



DUSK

Ascot Ottoman Bed Frame

Double/King

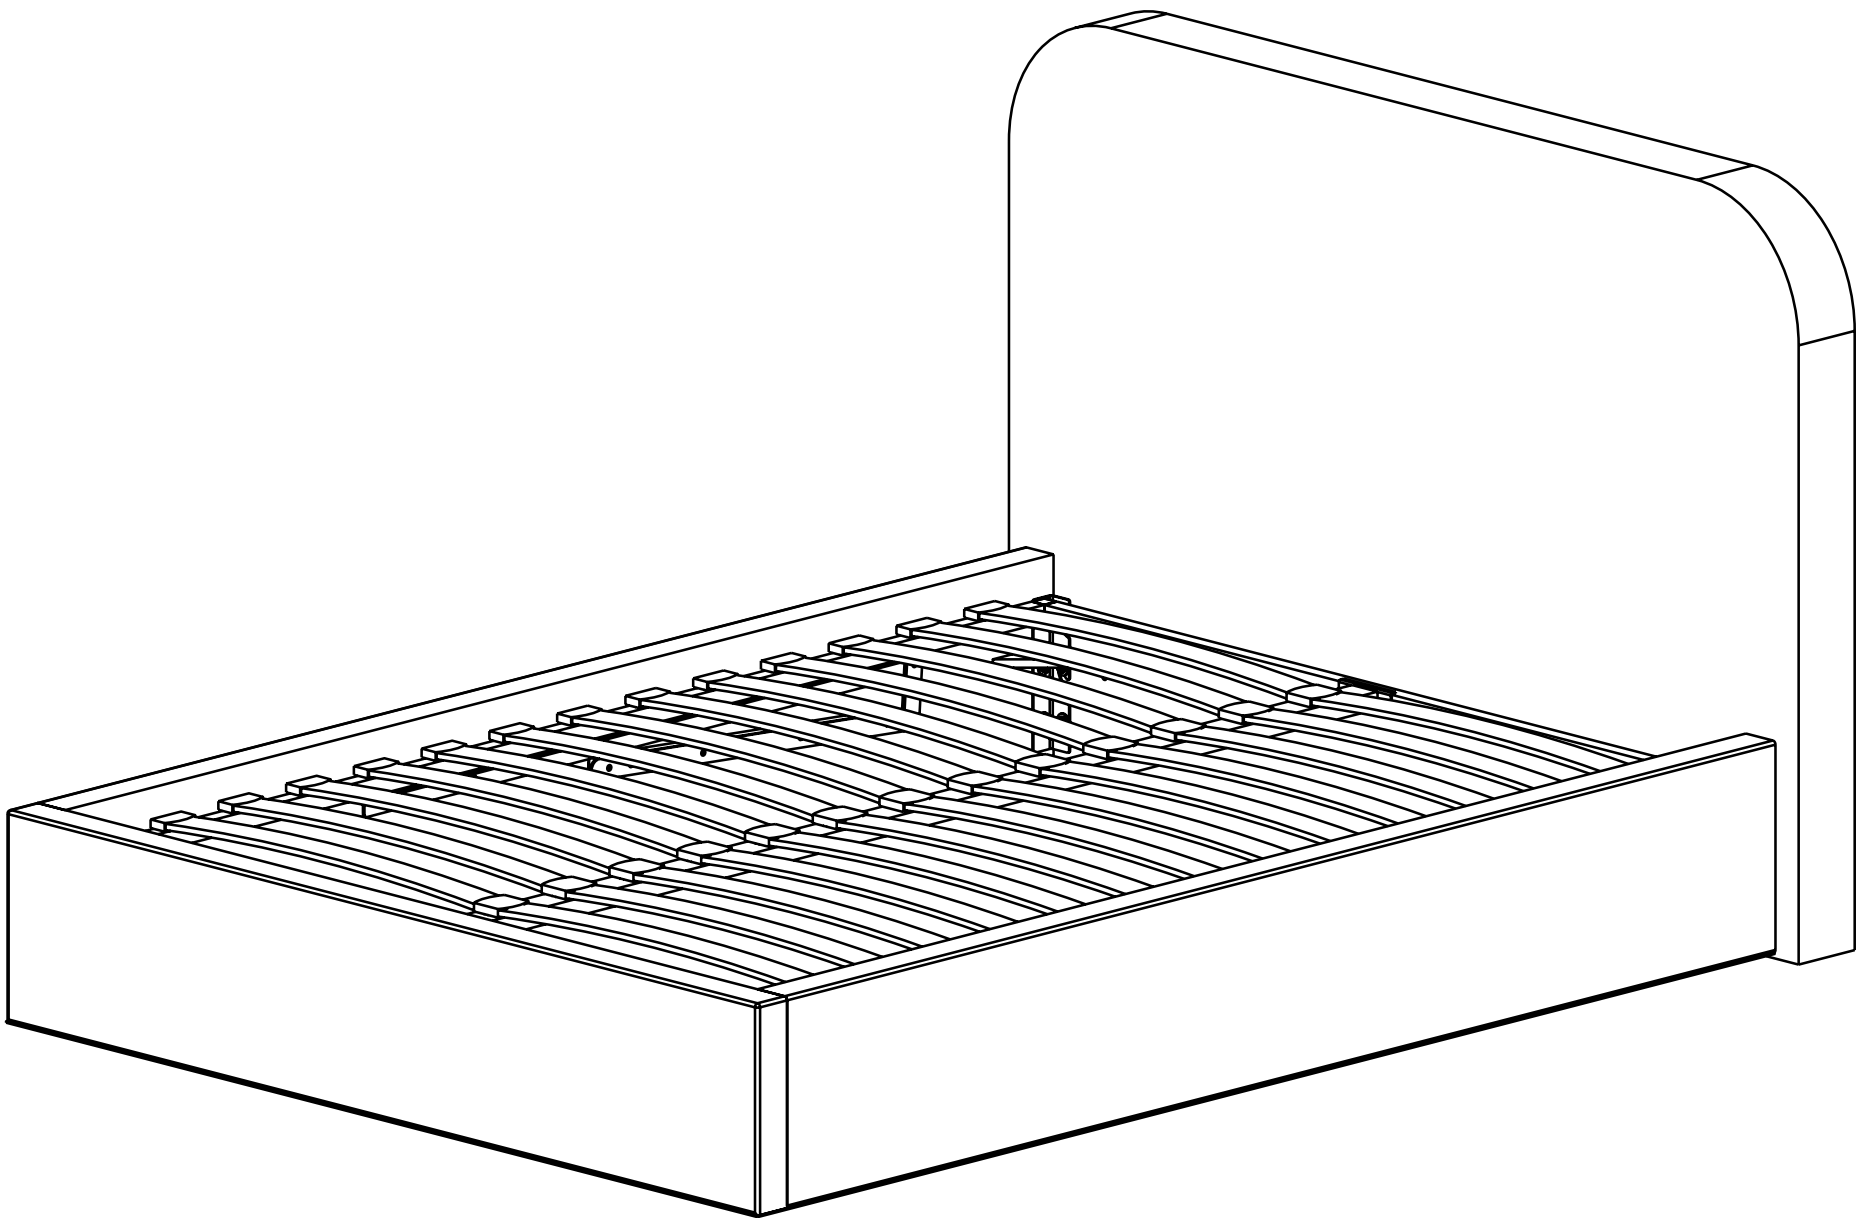

Up to 2 hours
assembly time



Two person
assembly

Important

Assembly Tip

Before you begin, it's best to identify all of the parts and fittings to build your ottoman bed frame. We advise laying these out on the floor to check you have everything, and to familiarise yourself with all of the parts and fittings before building.

Top Tip

We recommend that you build your new ottoman bed frame in the room you'd like it to be located. This will help prevent any risk of damage to the frame whilst moving it.

Safety and Care

It's important to ensure children and animals are kept away from the assembly area, as there are small components used in this bed frame which could present a choking hazard. All plastic and wrapping materials should also be kept away from children and animals to prevent any risk of suffocation.

Help and Support



Please contact our customer service team on 0113 519 0311 if you have any questions or issues with your purchase.

Recycling

Please ensure that packaging is disposed of in a safe and environmentally friendly way, and recycle where possible. Please keep your assembly instructions safe to refer back to in the future.


Operating Your Ottoman Bed Frame Safely

- Caution, this ottoman bed frame uses a pressurised mechanism.
- Please ensure children and animals are kept away from the ottoman bed frame when operating the mechanism.
- Use caution when operating and always use two hands at arm's length.
- You must always ensure the mattress is on the ottoman bed frame before lifting the mechanism. Failure to do so may result in injury or damage to the mechanism.
- If removing the mattress, make sure the ottoman bed frame is secured as it could flip open.
- Only use the storage compartment when the ottoman bed frame is fully in the upright position.
- Do not remain on the ottoman bed frame whilst the lifting mechanism is in use.
- Beware of entrapment. Keep both hands clear of the mechanism when operating.
- When lifting the ottoman bed frame, remove all bedding except the fitted sheet.
- Always use the strap to lift or lower the ottoman metal frame. Close the ottoman metal frame by pushing down firmly with both hands towards the centre of the bed frame with pressure.
- No children or animals should be left unattended when the ottoman bed frame is in the upright position.
- When fully assembled, raise and lower the ottoman metal frame 4/5 times to ensure the gas pistons are fully lubricated.
- Ensure to re-tighten all nuts and bolts within the ottoman bed frame after the first two weeks of use.

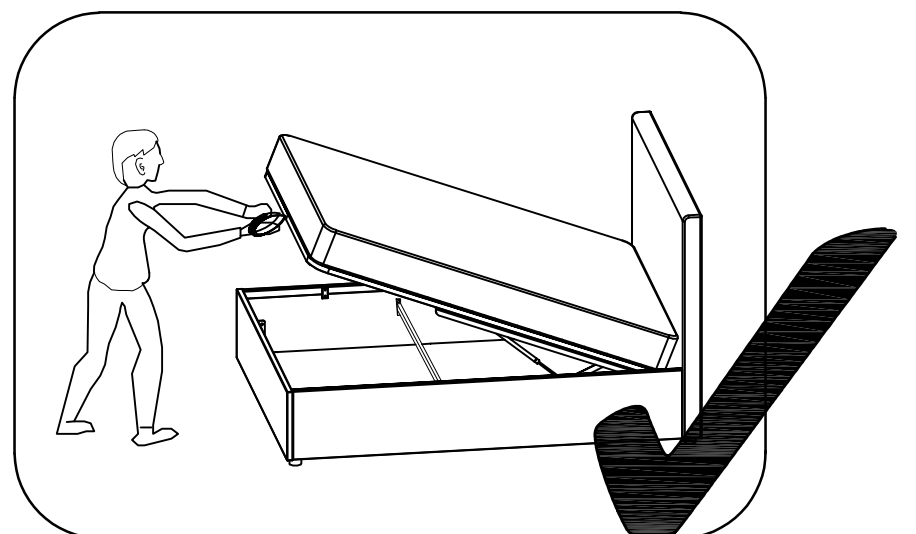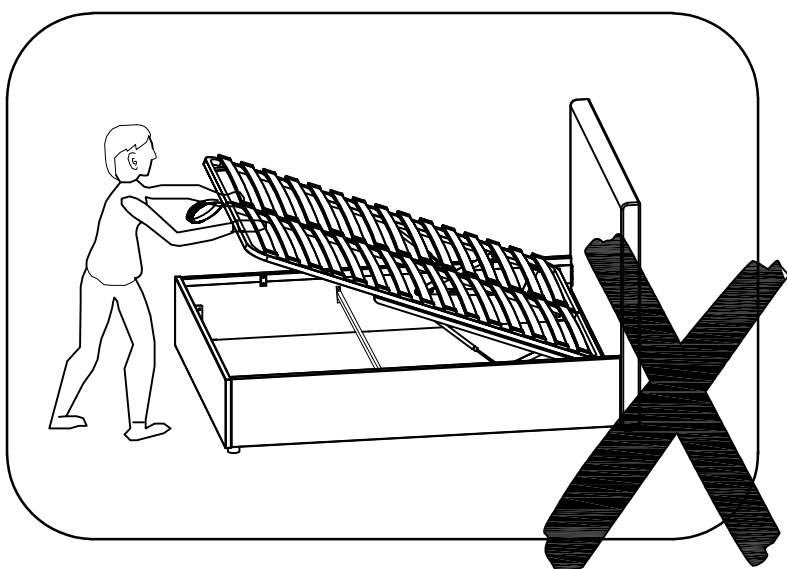

Parts

Before you begin building your ottoman bed frame, please take a moment to read through the instructions and make sure that you have all the relevant parts listed on the parts check list.

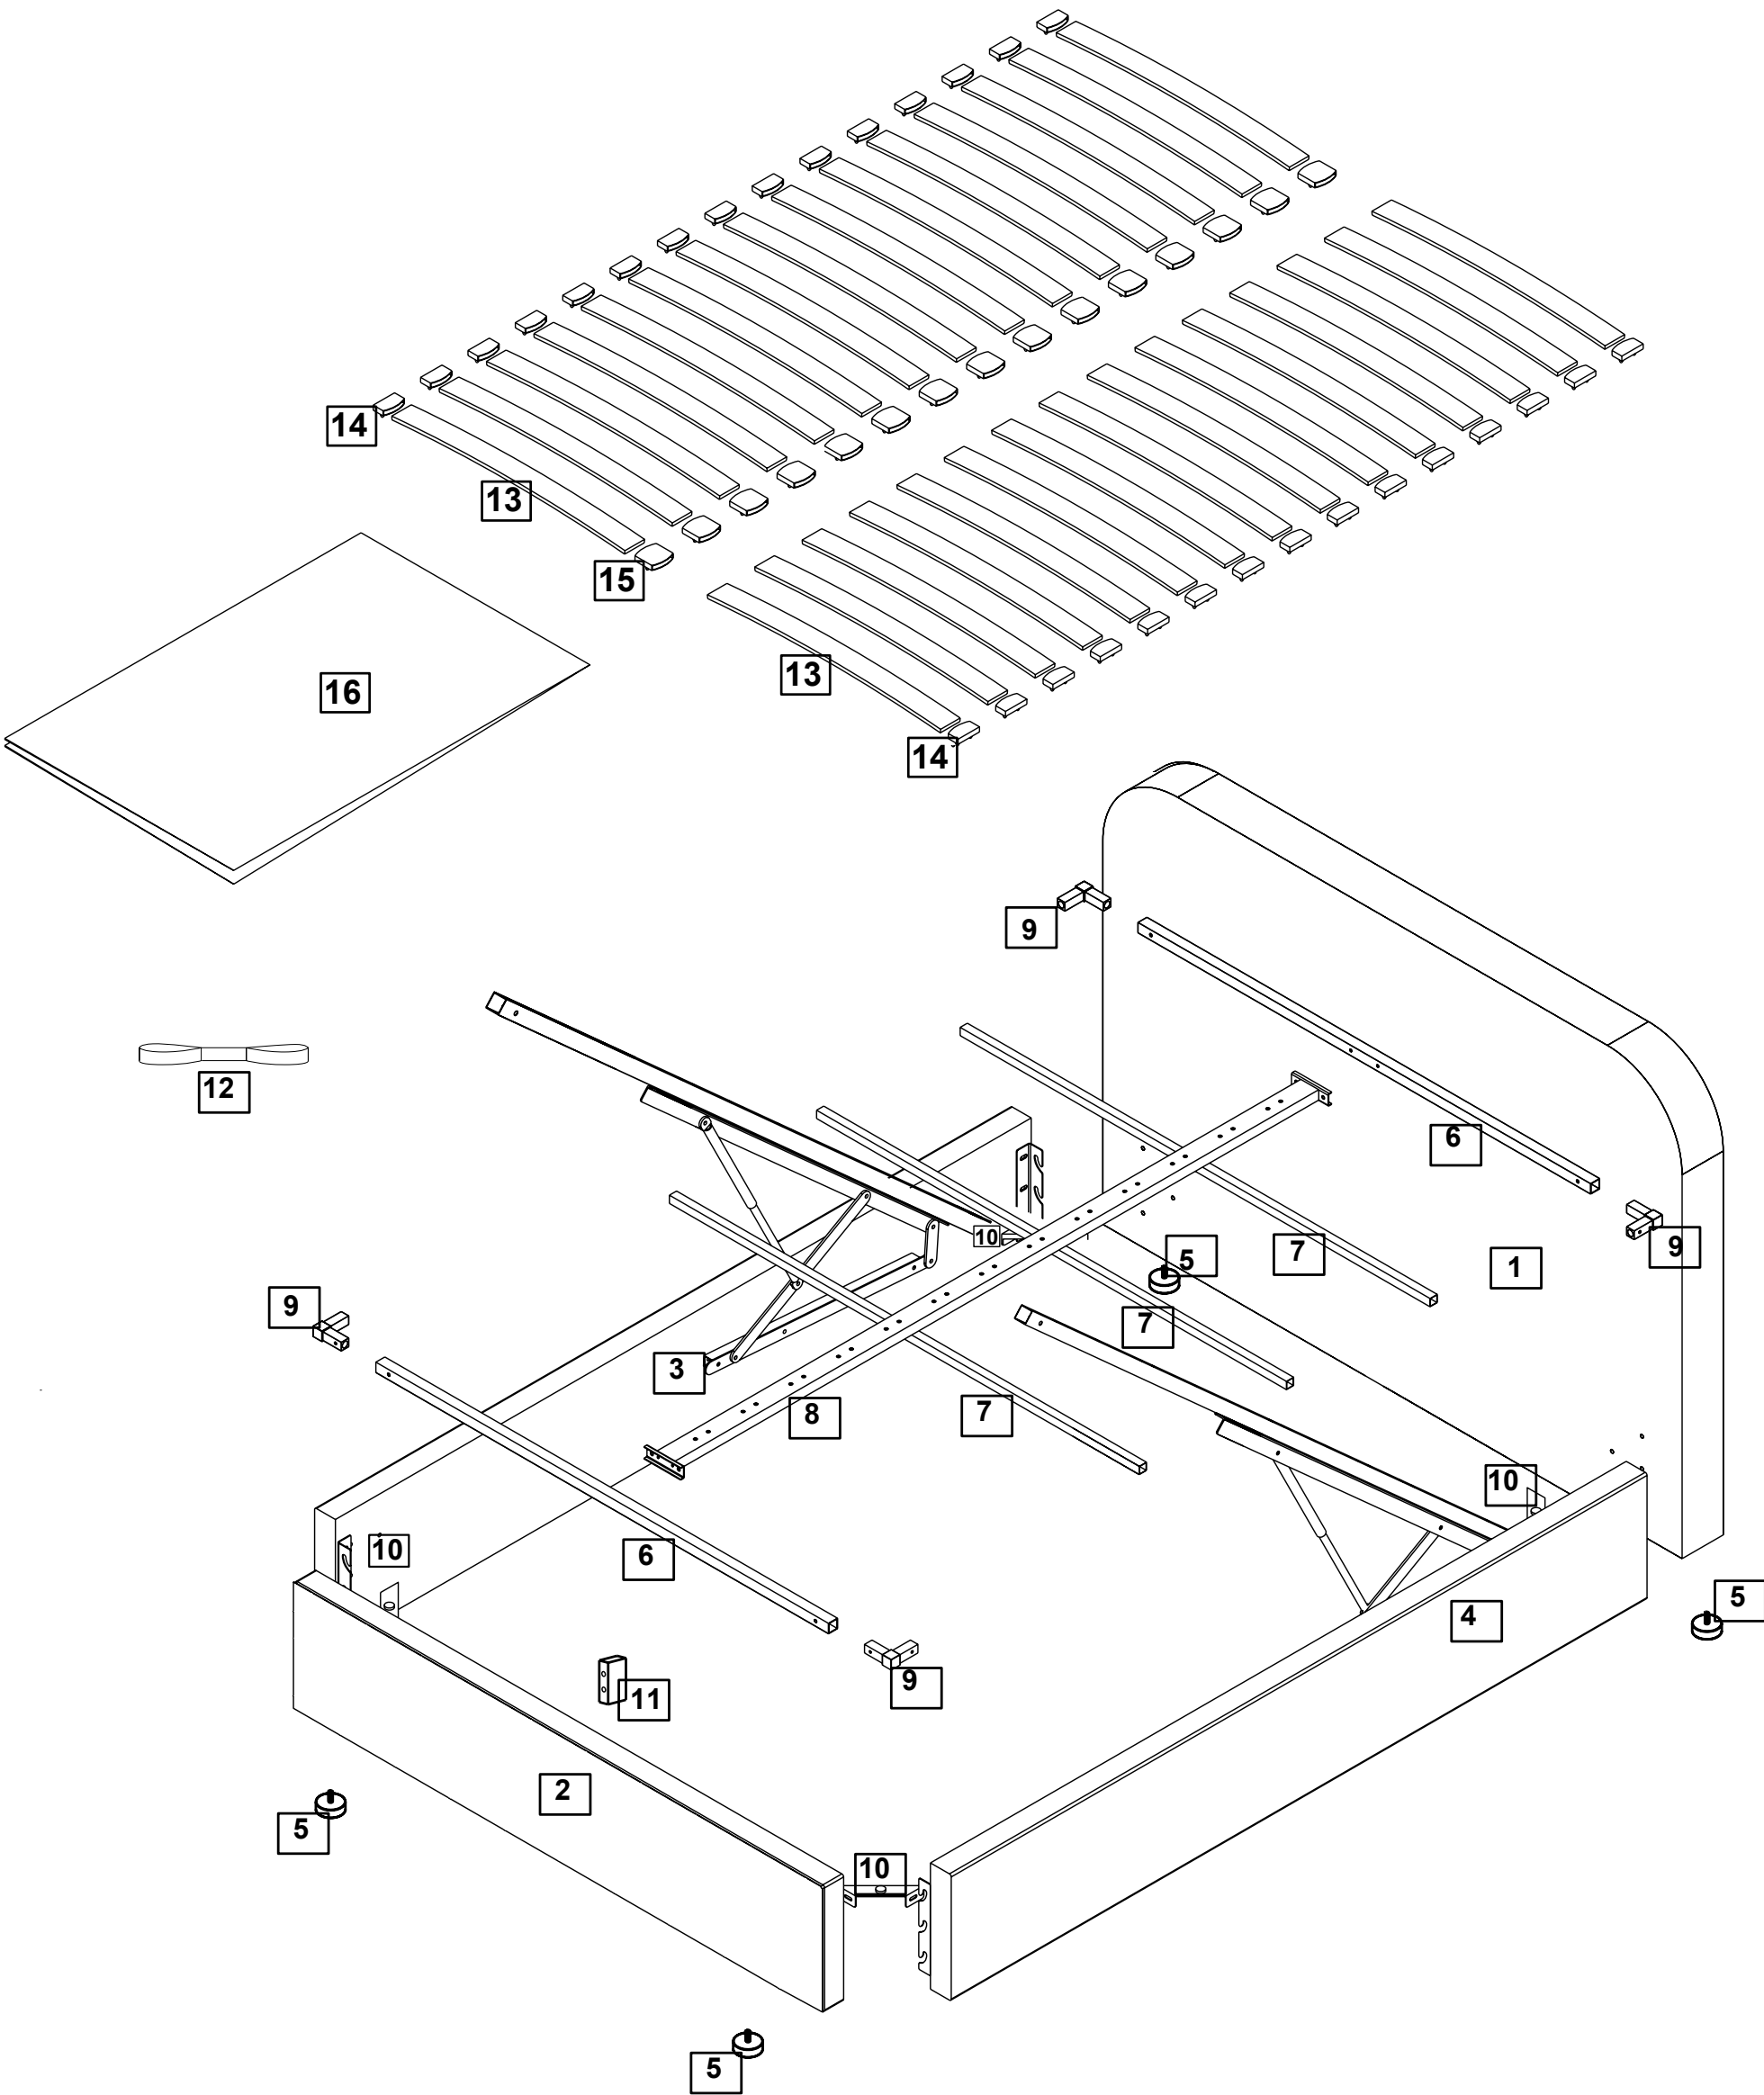











Parts Check List

| No. | Parts List | Qty | No. | Parts List | Qty |
|-----|------------------------------------|------|-----|-----------------------------|----------|
| 1 | Headboard | 1pc | 9 | Plastic Corner Bracket | 4pcs |
| 2 | Footboard | 1pc | 10 | Angle Corner Bracket | 4pcs |
| 3 | Slde Rall with Lift Mechanism - LH | 1pc | 11 | Holding Block | 1pc |
| 4 | Slde Rall with Lift Mechanism - RH | 1pc | 12 | Strap | 1pc |
| 5 | Adjustable leg | 4pcs | 13 | Slat | 26/30pcs |
| 6 | Front/Rear Ottoman Metal Frame | 2pcs | 14 | Side Slat Cap Double/king | 26/30pcs |
| 7 | Horizontal Support Rail | 3pcs | 15 | Centre Slat Cap Double/king | 13/15pcs |
| 8 | Central Support Rail | 1pc | 16 | Fabric Base | 1pc |

Fittings


Please check you have all the fittings listed below with your product

| | | | |
|---|--|---|---|
|  Ⓐ M8 40mm Bolt 12pcs |  Ⓑ M6 80mm Bolt 2pcs |  Ⓒ M6 30mm Bolt 6pcs |  Ⓓ M6 25mm Bolt 12pcs |
|  Ⓔ M8 Nut 2pcs |  Ⓕ Spring Washer 12pcs |  Ⓖ M8 Flat Washer 12pcs |  Ⓗ M5 Allen Key 1pc |
|  Ⓘ M4 Allen Key 1pc |  Ⓙ Spanner 1pc | | |

NB: there are additional spare Fittings included within the Fitting pack



Step 1: Attaching the Bolts to the Headboard & Footboard

- A 12pcs
- F 12pcs
- G 12pcs
- H 1pc

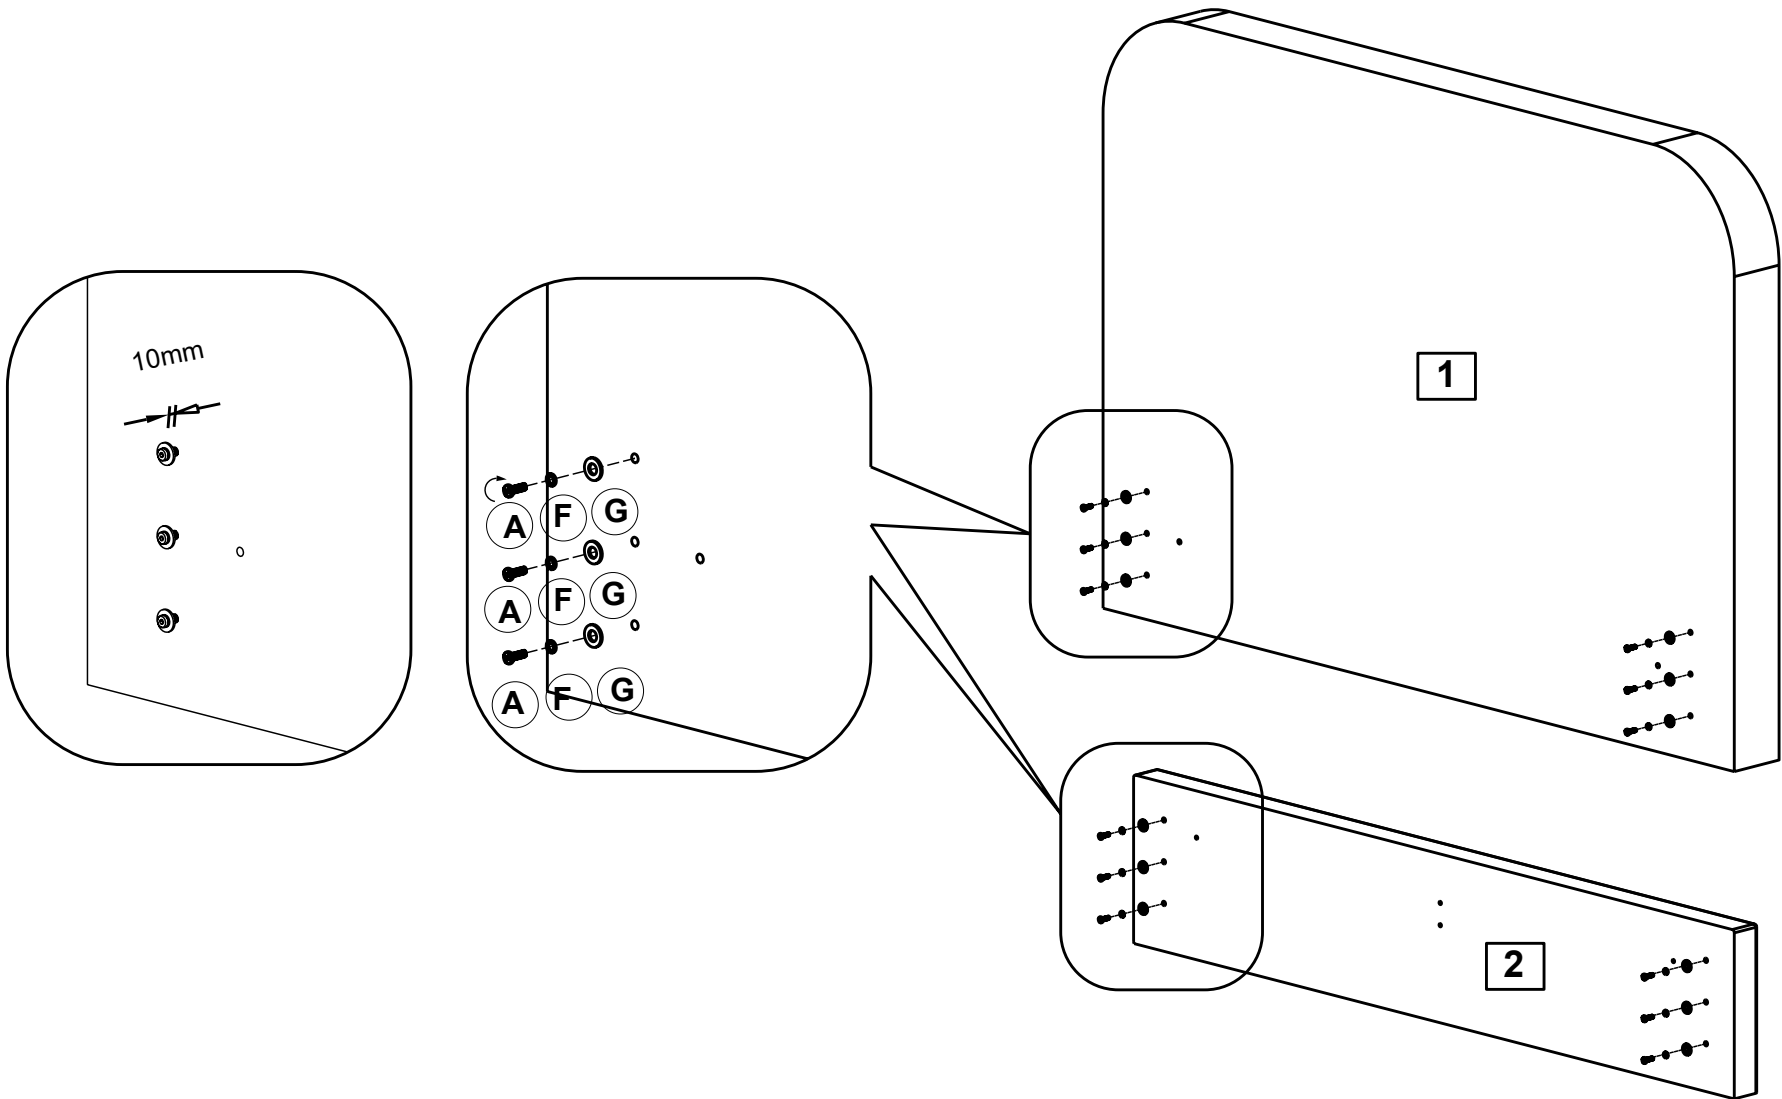

Step 2: Attaching the Left & Right Side Rails to the Headboard & Footboard


NB: The Angle Iron Brackets & Lift Mechanisms are pre-attached.

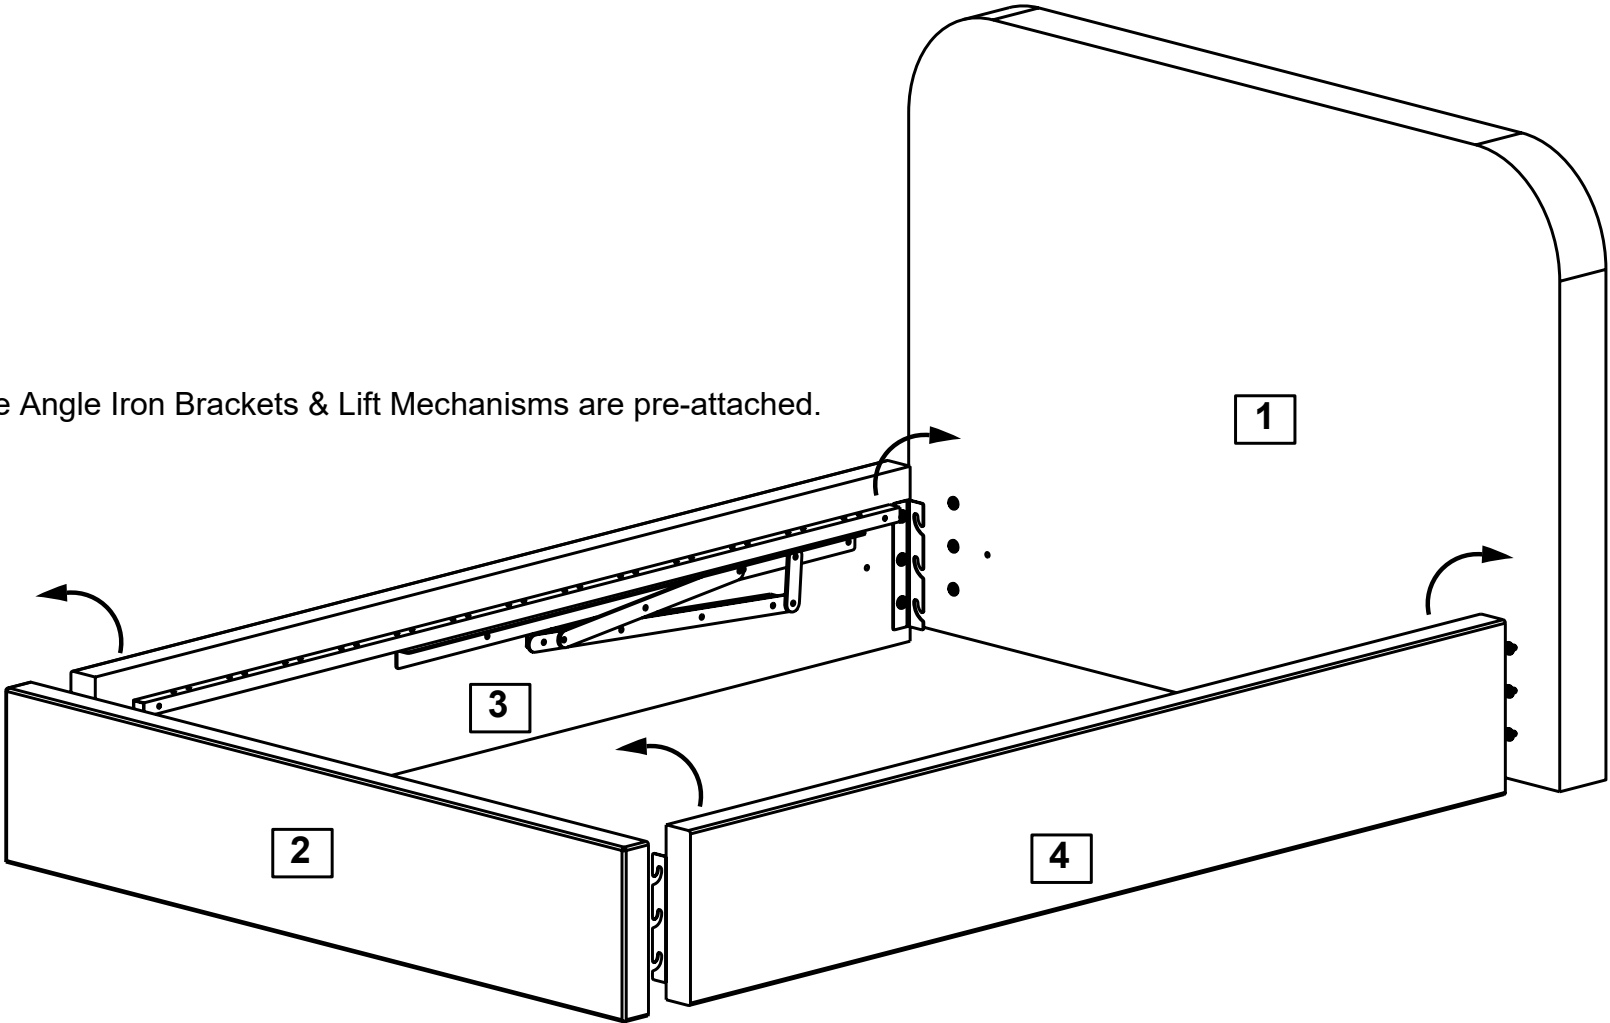

NB: Before tightening the bolts, please ensure the bed frame is square

Step 3: Attaching the Side Rails to the Headboard & Footboard using the Angle Corner Brackets


- Ⓑ 2pcs
- Ⓓ 8pcs
- Ⓘ 1pc

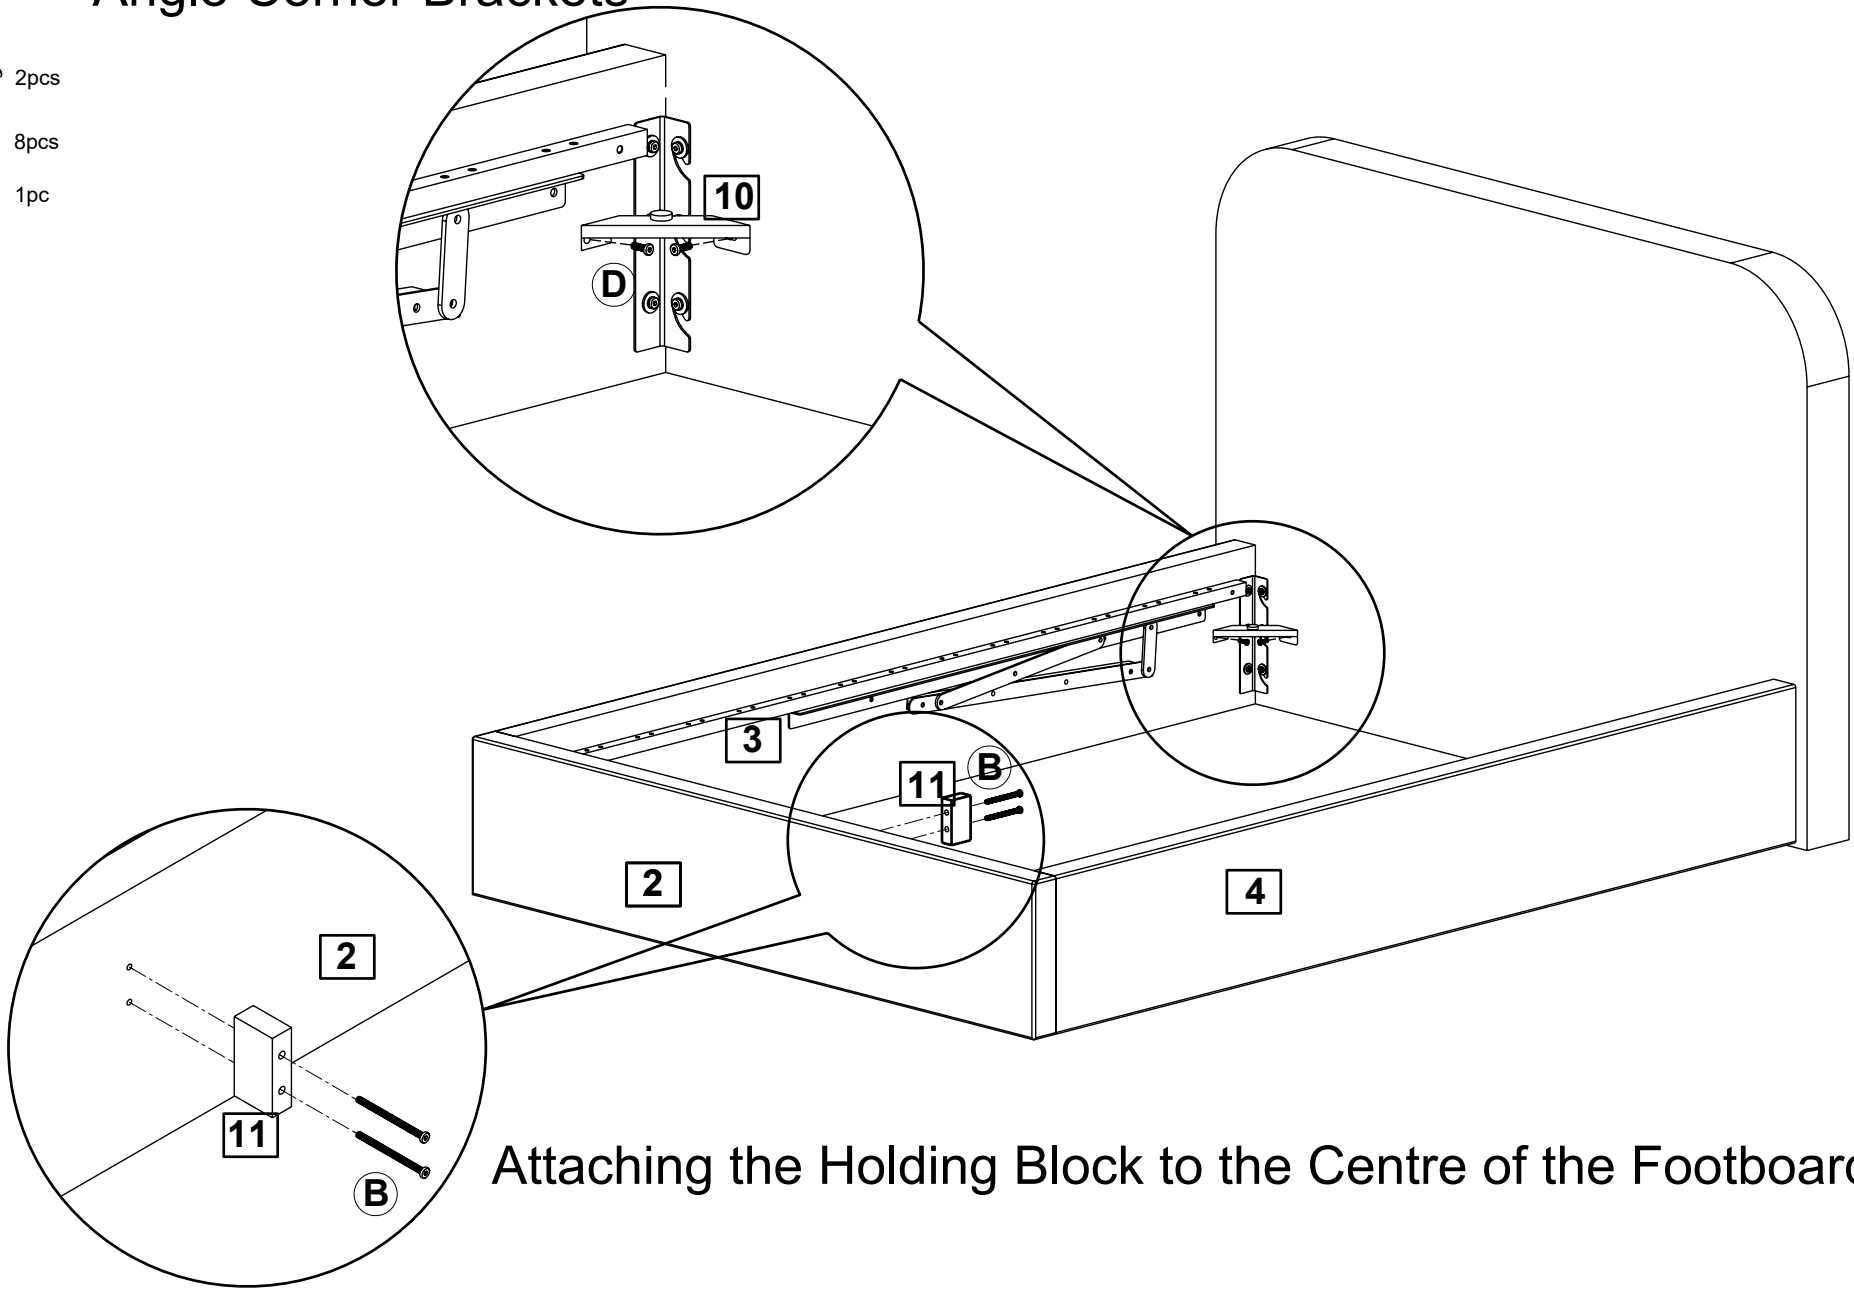



Step 4: Securing the Left & Right Side Rails to the Lifting Mechanism

- Ⓔ 2pcs
- Ⓙ 1pc

a:

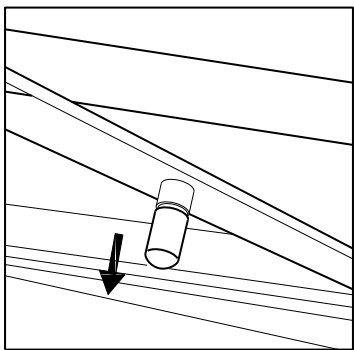



b:

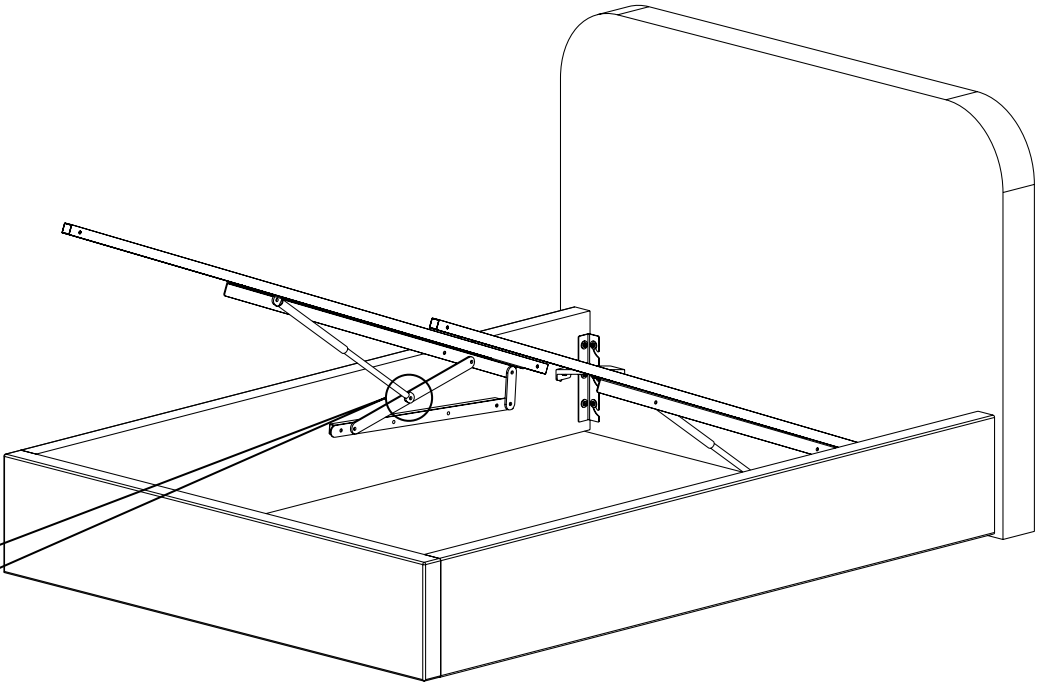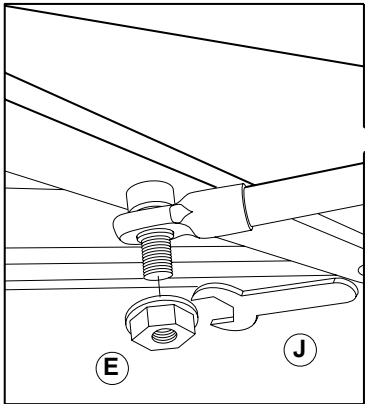

Leave the ottoman bed frame in an elevated position.

NB:Do not over tighten the Nuts.

Step 5: Attaching the Fabric Base & Legs

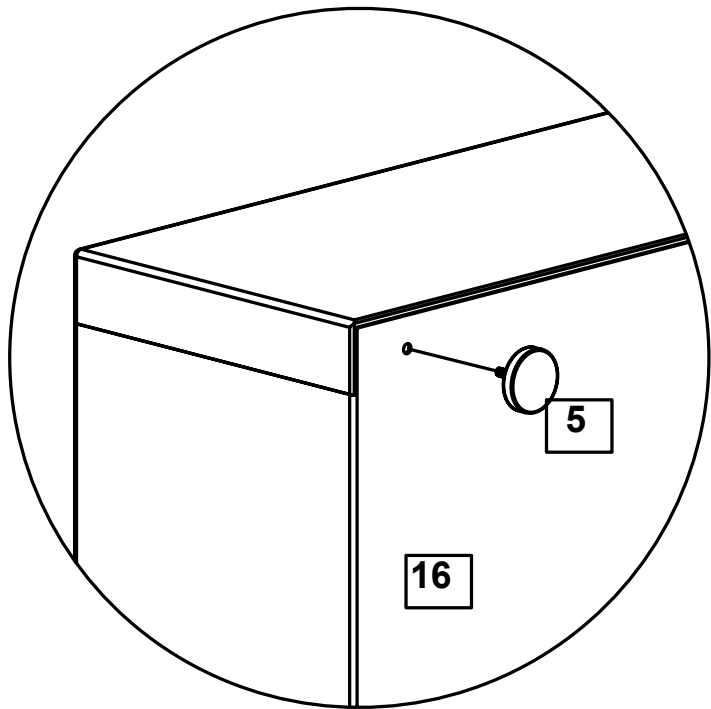
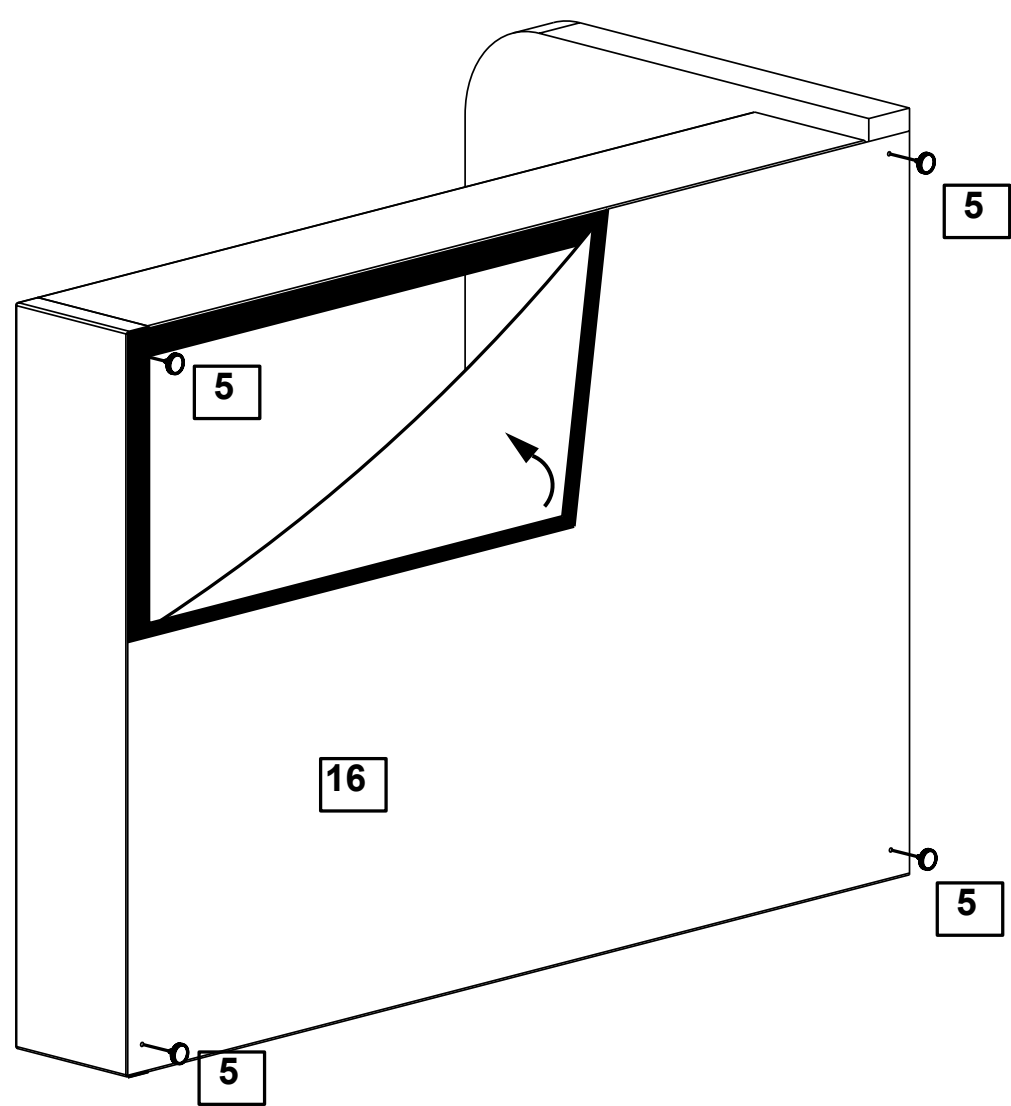


Attach the Legs (5) to the base and tighten.



Step 6: Attaching the Rear Ottoman Metal Frame to the Side Rails





Attach the Rear Ottoman Metal Frame (6) to the Left and Right Hand Side Rails with the Plastic Corner Brackets (9).

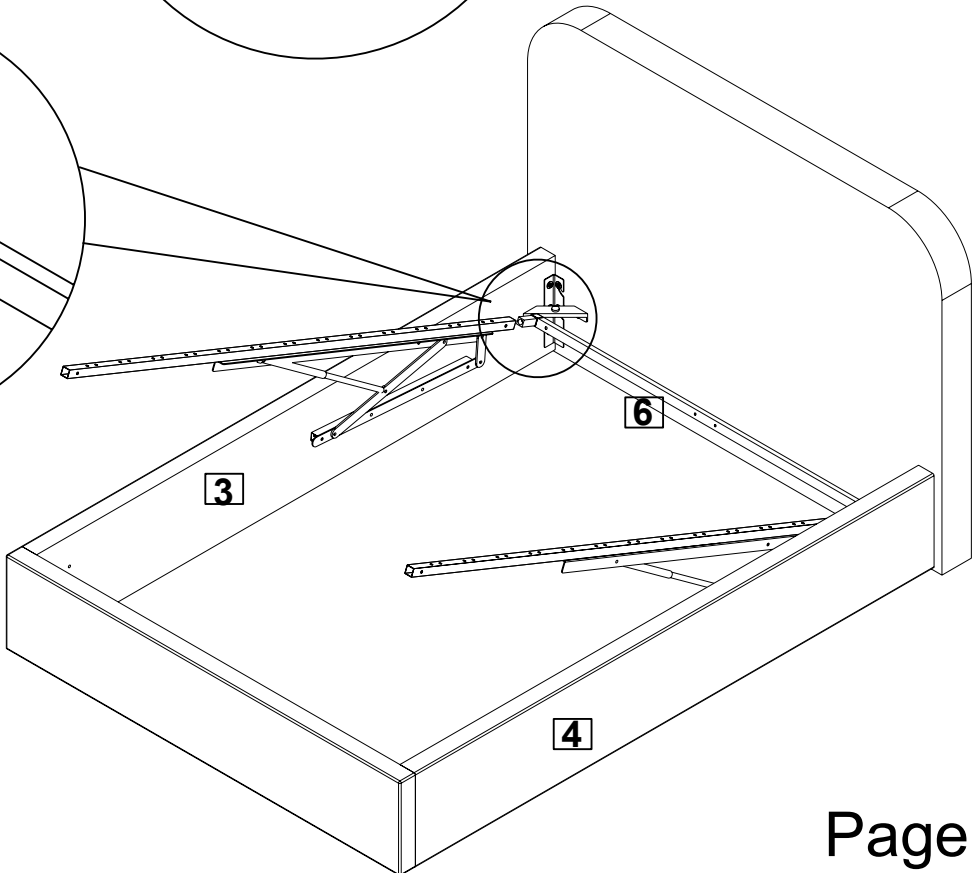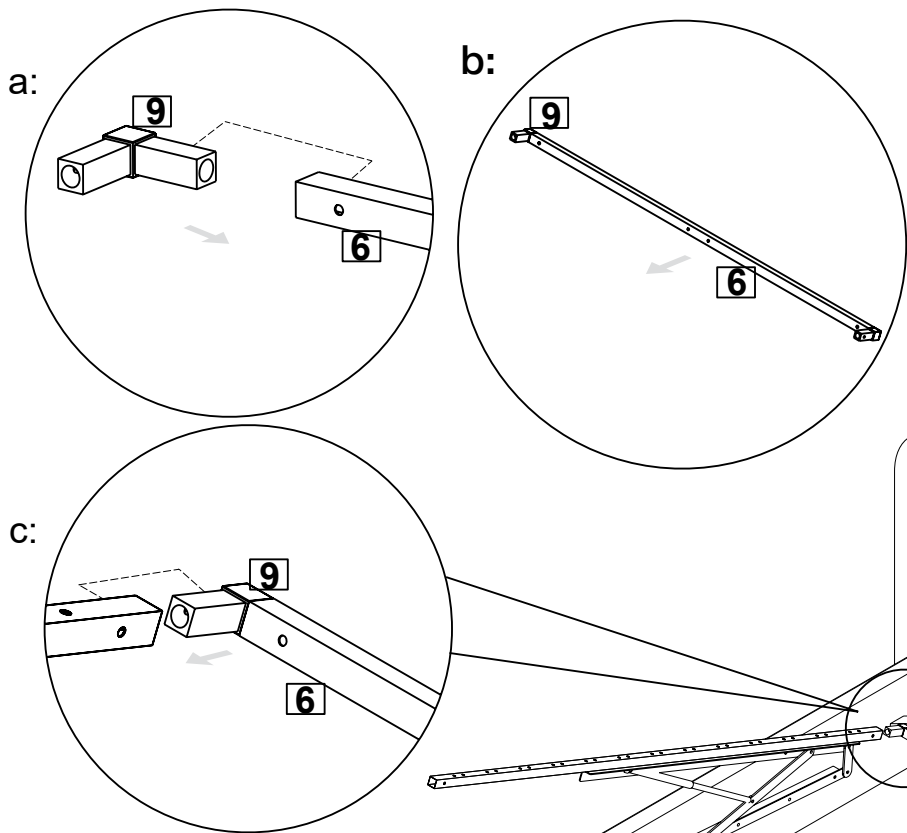

Step 7: Attaching the Horizontal Support Rails to the Left & Right Side Rails

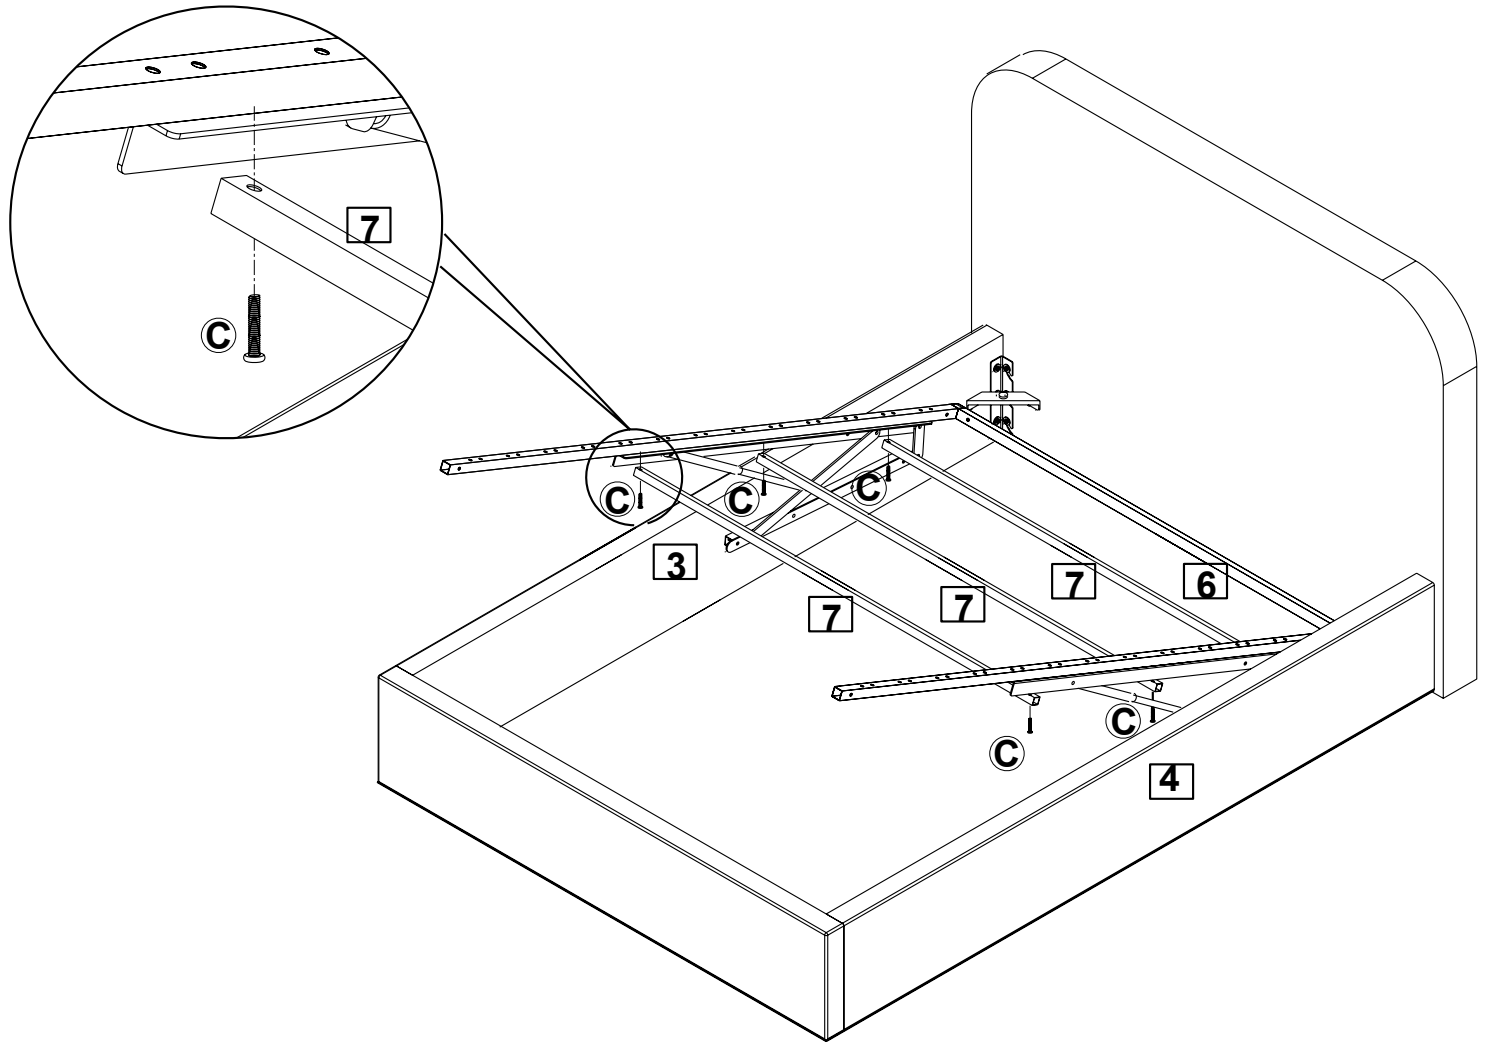


Step 8: Attaching the Centre Support Rail to the Rear Ottoman Metal Frame

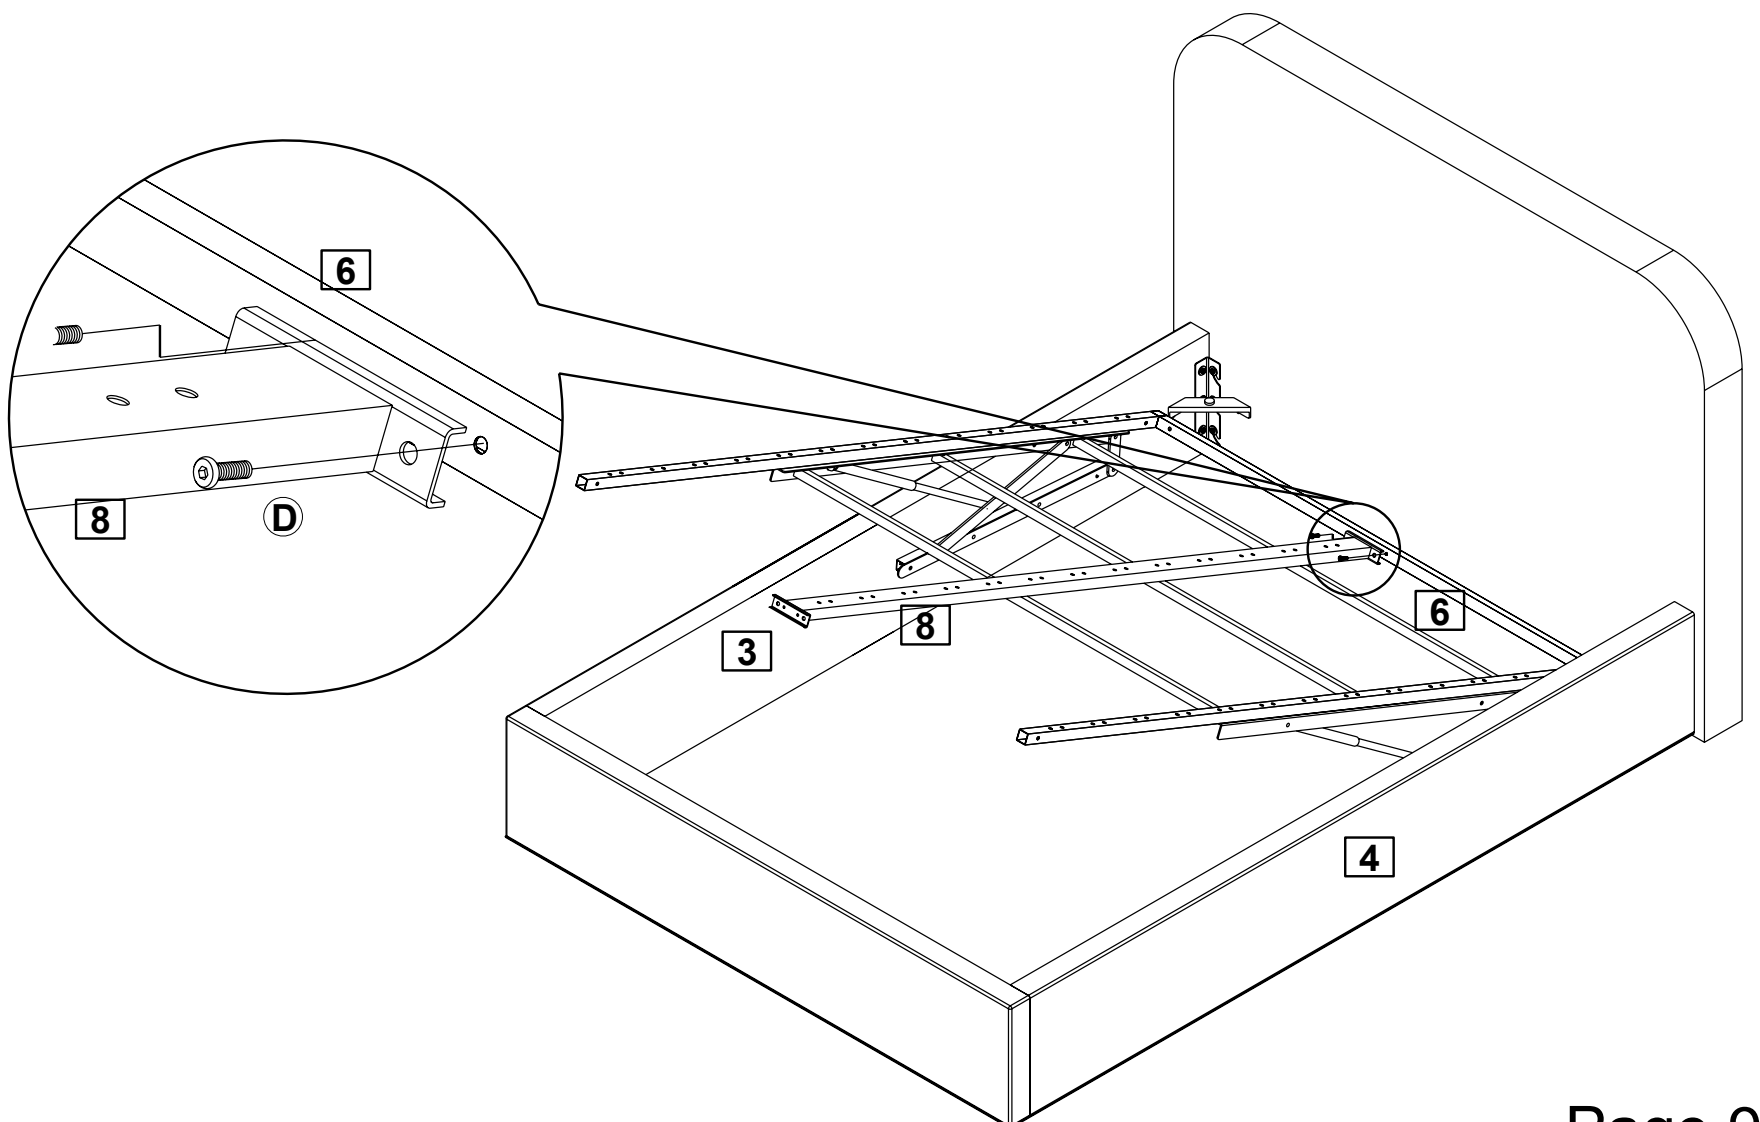


Step 9:

Attaching the Central Support Rail & Side Rails to the Front Ottoman Metal Frame


- 9




2pcs
- D



2pcs

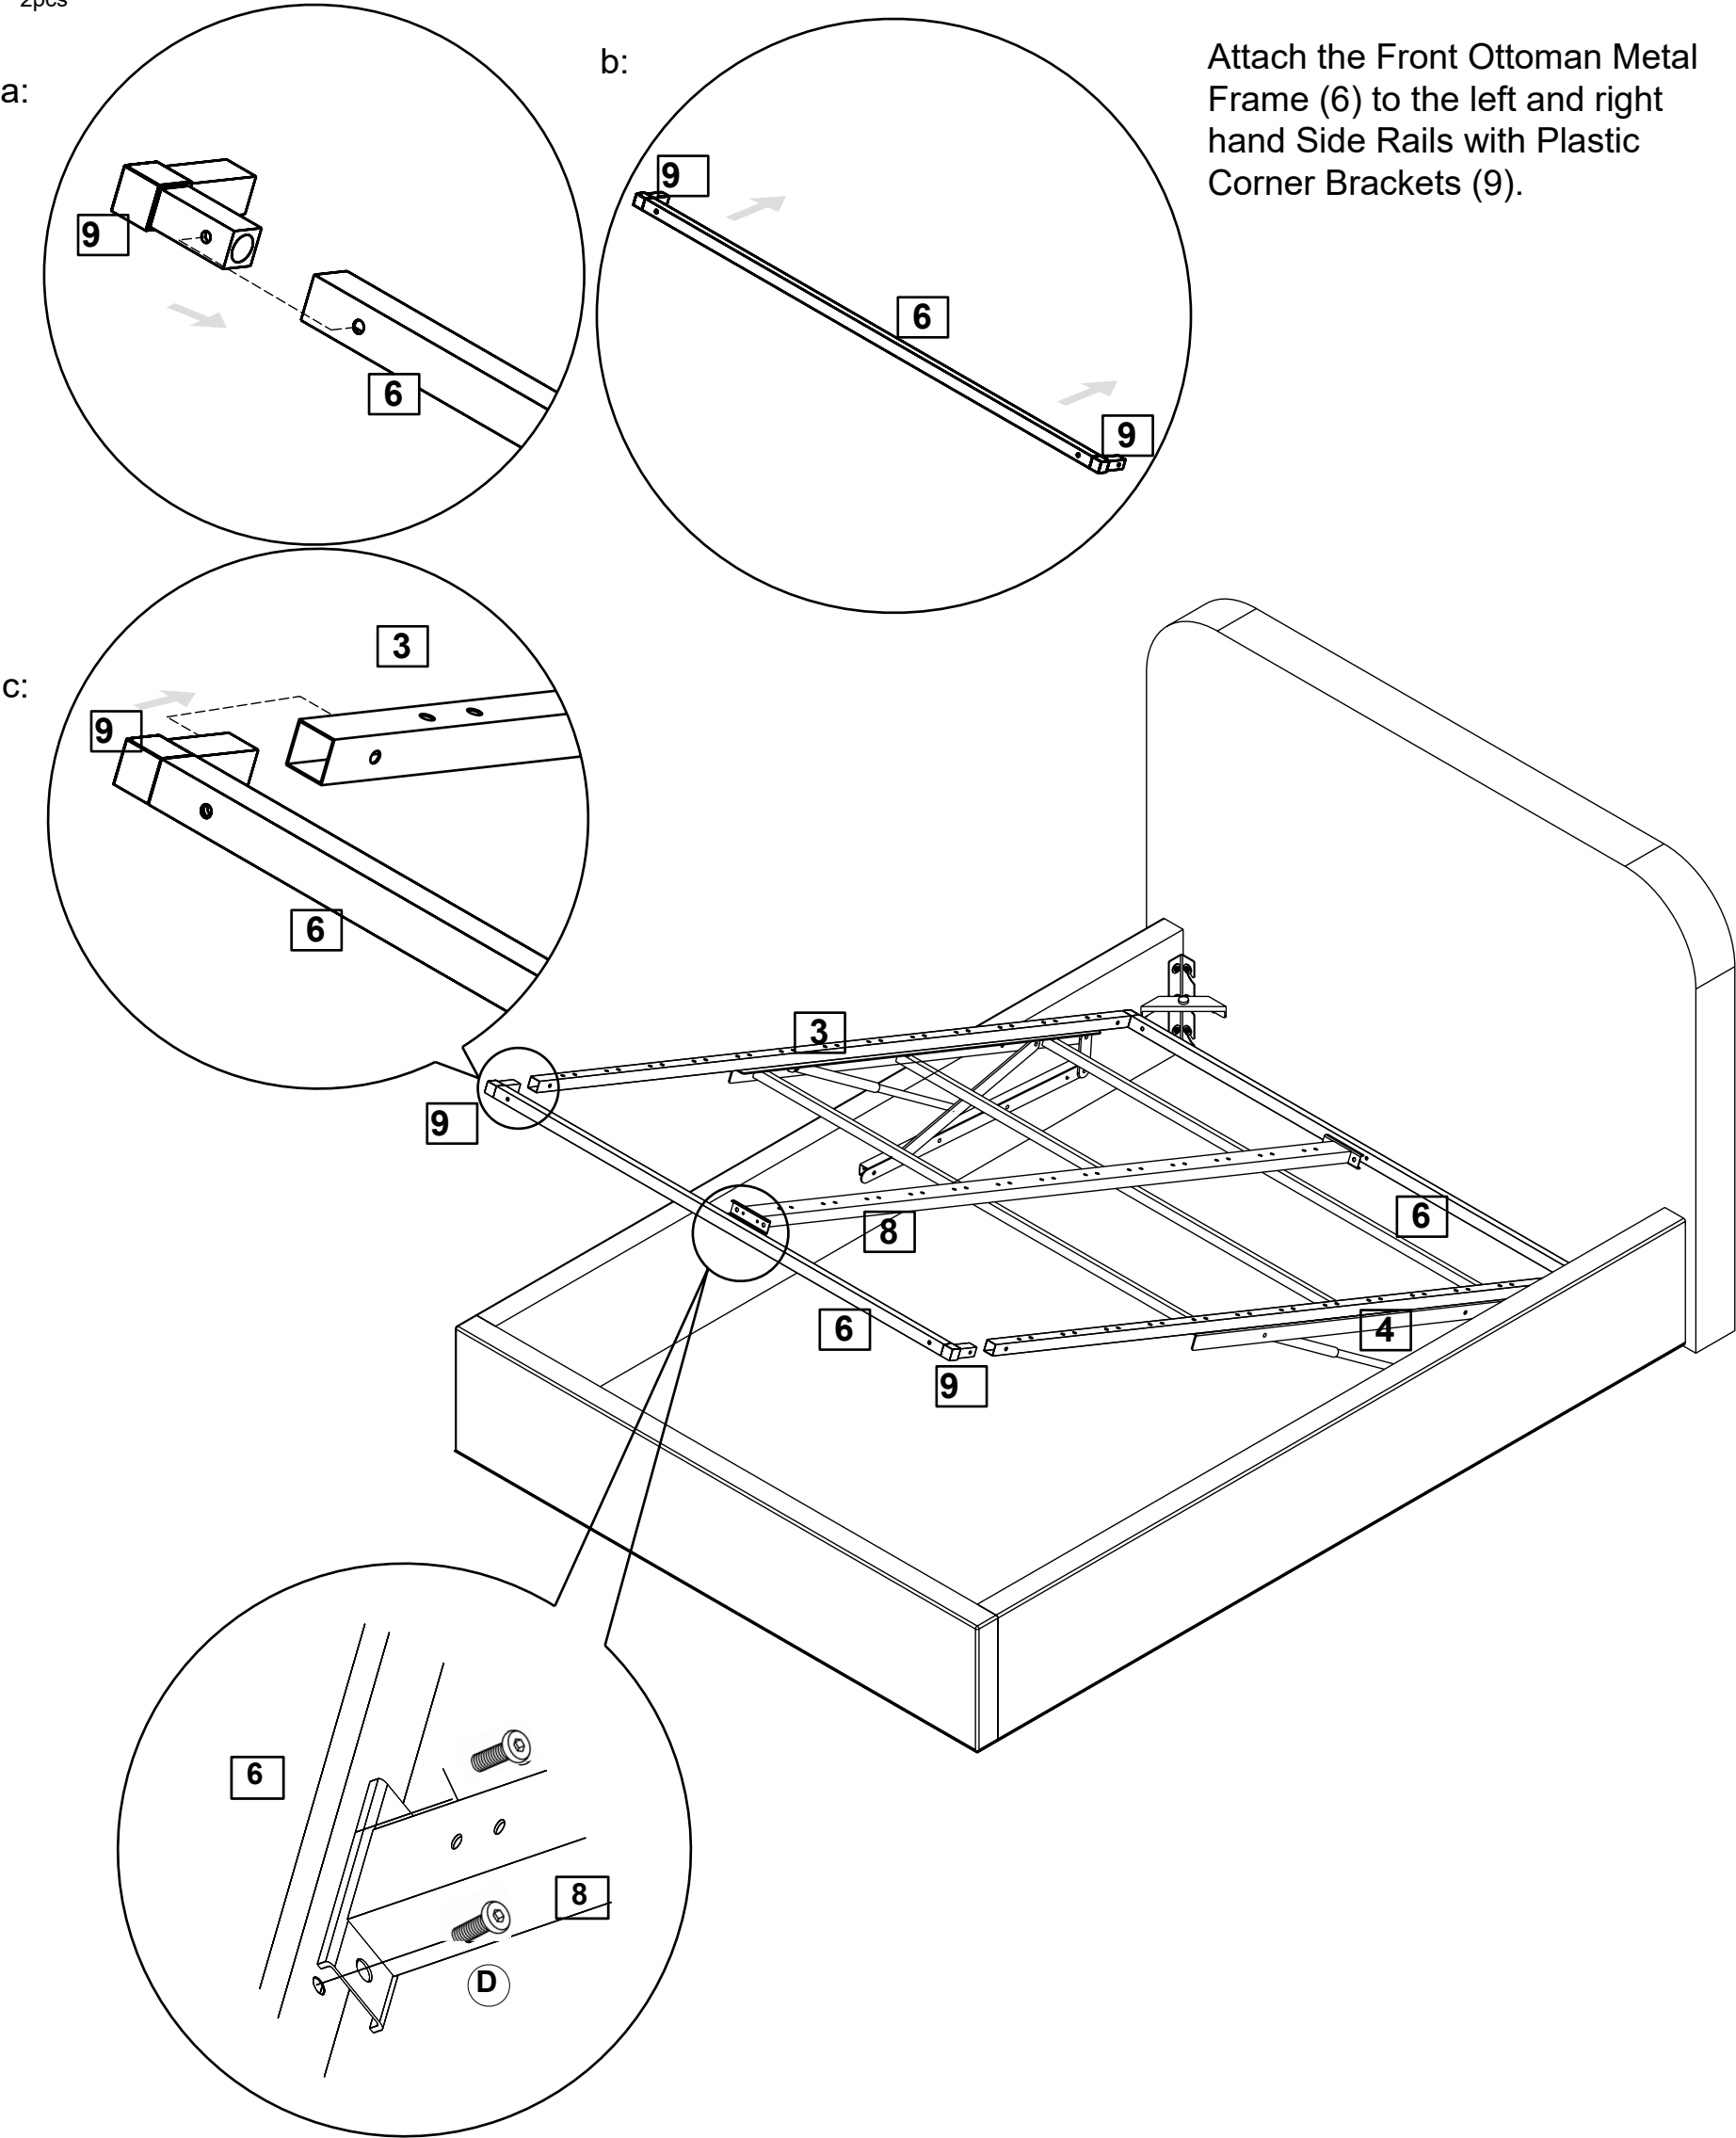


Step 10: Attaching the Slats & Strap to the Ottoman Metal Frame

14  Side Slat Caps Double/King 26/30 pcs

15  Centre Slat Caps Double/King 13/15 pcs

Push down firmly on the Slat Caps into the pre-drilled holes on the Ottoman Metal Frame. It is recommended to push the Centre Slat Caps into position before pushing down on the Side Slat Caps.

Attaching the Slats & Strap to the Ottoman Metal Frame – this is much easier to do with the frame closed. The frame needs to be closed without the mattress, and may need more force than expected – refer to the last page for gas strut trouble shooting.

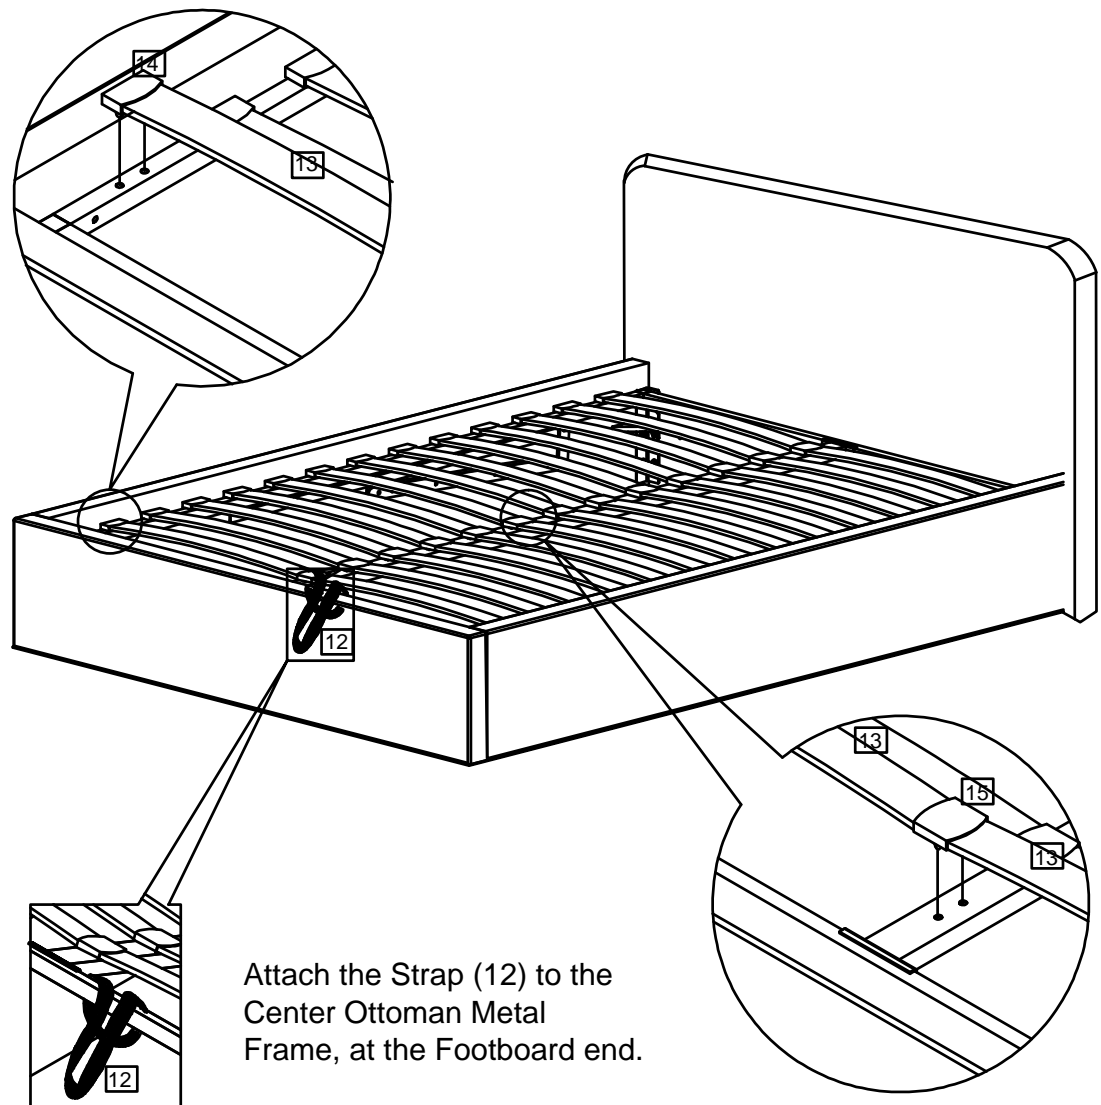

Care and Maintenance

Here are some good tips to keep your new ottoman bed frame in tip-top condition.

Cleaning

To clean your new ottoman bed frame, we advise using a damp cloth if the fabric is dusty or a low suction vacuum. Do not use abrasive chemicals or bleach as this may damage the product.

Checking and Moving

Periodically, we recommend you check that the screws and fixtures haven't become loose over time. To move your bed frame, we recommend lifting it where possible, as dragging or pushing it could cause damage to the legs or flooring.

Fabric

Please note, depending on the lighting, positioning and surroundings of your room, the shade of the fabric will appear differently. Over a period of time, the fabric may also lighten or fade slightly due to light exposure.

Gas strut/piston best use:

- Use caution when operating - always use two hands.
- Only attempt to close the ottoman frame, once the mattress has been placed on the frame.
- The thicker side of the cylinder should be above the thinner side- this will increase longevity of the part.
- Only attempt to close the frame with two hands from the footboard side, slowly increasing the pressure until the frame starts moving downwards.
- Closing the frame for the first time may be difficult, as the cylinder needs cycling and lubricating. After closing for the first time, open and close a further 5 times.
- If the frame is stuck open and unable to be closed, we recommend getting assistance from a second person, both applying equal pressure from each side of the footboard until the frame closes, this may require more force than expected. Stop applying pressure if the metal frame begins to warp – contact customer services at this point.



Top tips:

- Do not attempt to close the gas strut/piston by hand, it can only be compressed once added to the frame
- Ensure the frame can move freely before adding the gas struts/pistons
- Check the frame is fully square, being offset can cause the frame to catch on the side rail


DUSK

Ascot Ottoman Bed Frame

Super King

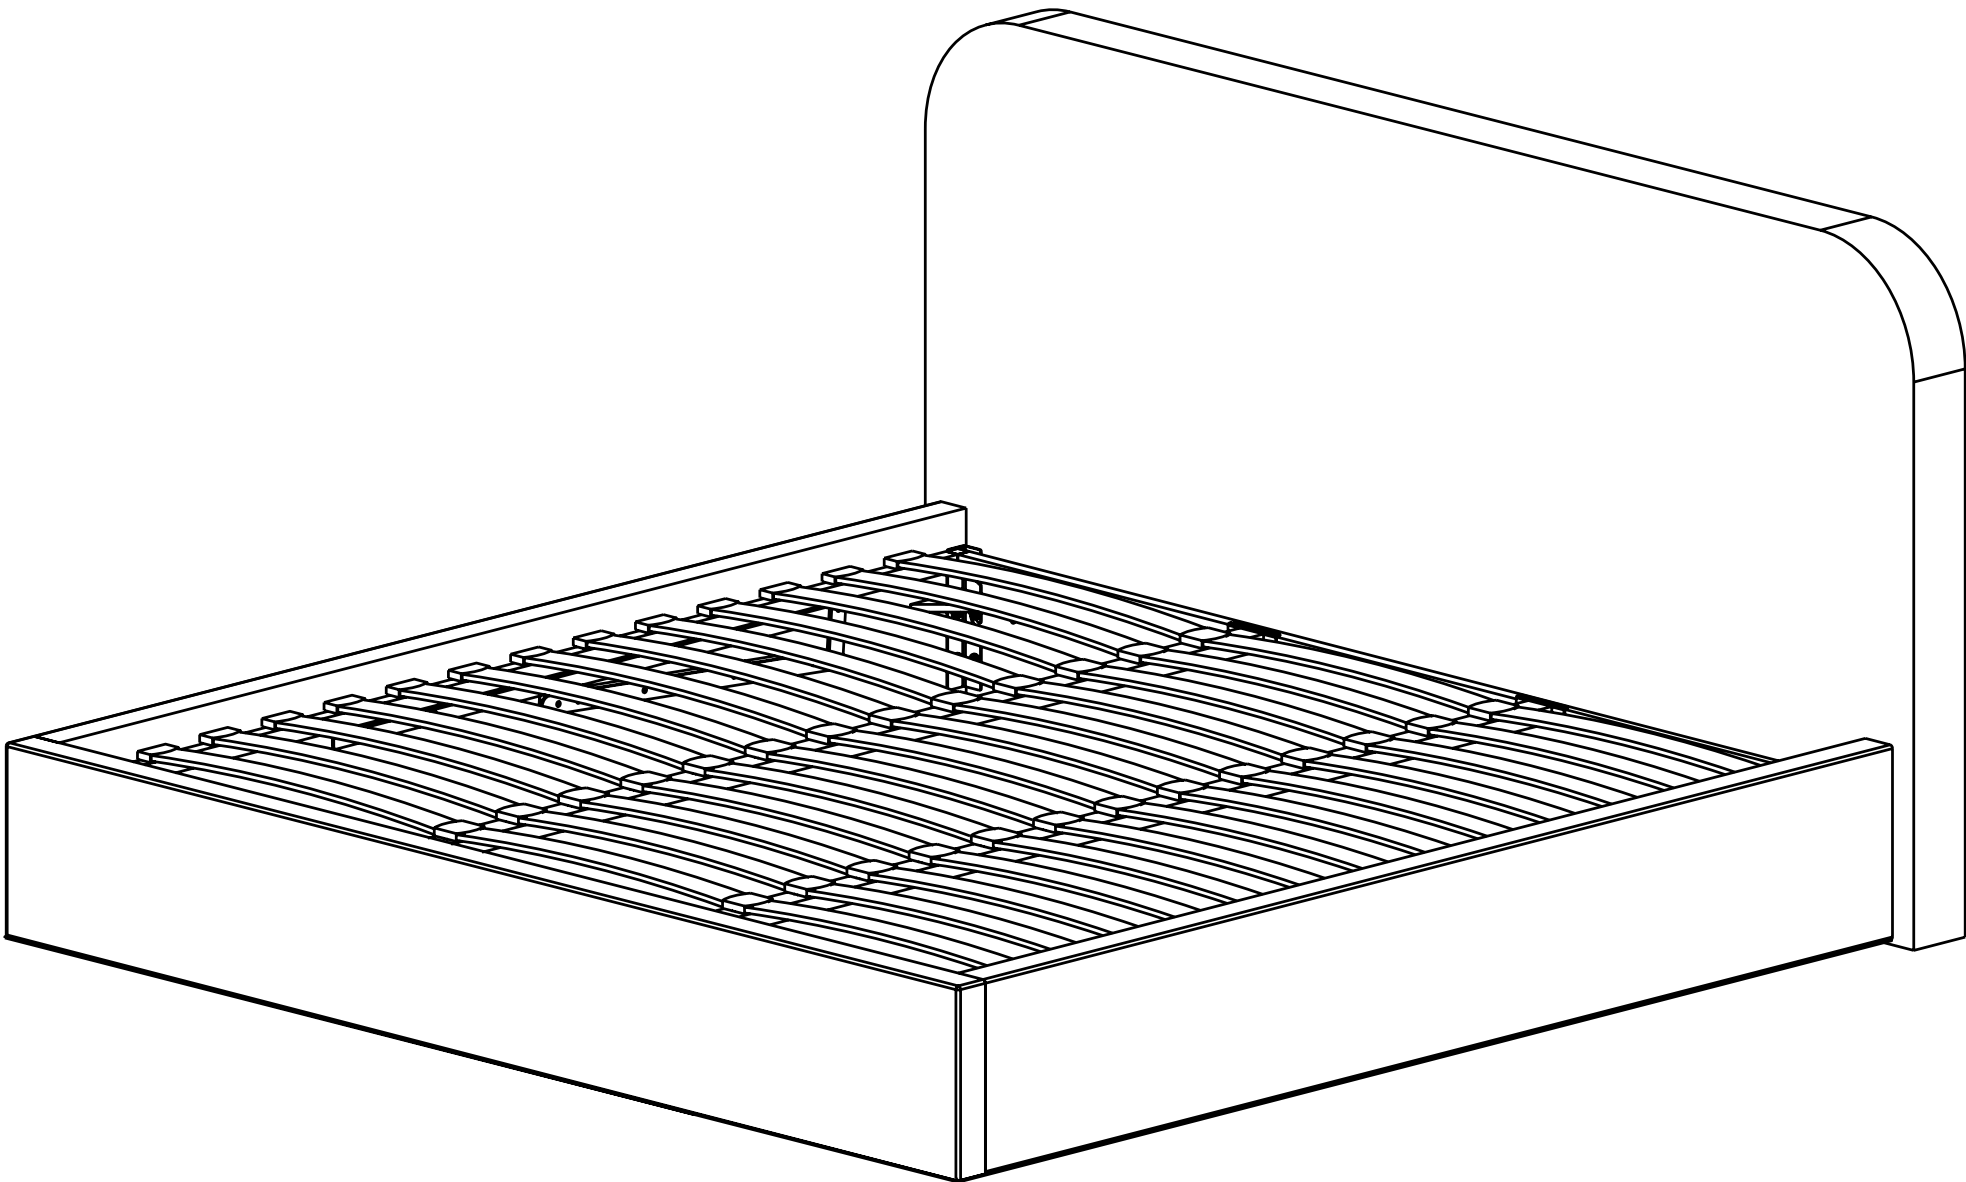

Up to 2 hours
assembly time



Two person
assembly

Important

Assembly Tip

Before you begin, it's best to identify all of the parts and fittings to build your ottoman bed frame. We advise laying these out on the floor to check you have everything, and to familiarise yourself with all of the parts and fittings before building.

Top Tip

We recommend that you build your new ottoman bed frame in the room you'd like it to be located. This will help prevent any risk of damage to the frame whilst moving it.

Safety and Care

It's important to ensure children and animals are kept away from the assembly area, as there are small components used in this bed frame which could present a choking hazard. All plastic and wrapping materials should also be kept away from children and animals to prevent any risk of suffocation.

Help and Support



Please contact our customer service team on 0113 519 0311 if you have any questions or issues with your purchase.

Recycling

Please ensure that packaging is disposed of in a safe and environmentally friendly way, and recycle where possible. Please keep your assembly instructions safe to refer back to in the future.


Operating Your Ottoman Bed Frame Safely

- Caution, this ottoman bed frame uses a pressurised mechanism.
- Please ensure children and animals are kept away from the ottoman bed frame when operating the mechanism.
- Use caution when operating and always use two hands at arm's length.
- You must always ensure the mattress is on the ottoman bed frame before lifting the mechanism. Failure to do so may result in injury or damage to the mechanism.
- If removing the mattress, make sure the ottoman bed frame is secured as it could flip open.
- Only use the storage compartment when the ottoman bed frame is fully in the upright position.
- Do not remain on the ottoman bed frame whilst the lifting mechanism is in use.
- Beware of entrapment. Keep both hands clear of the mechanism when operating.
- When lifting the ottoman bed frame, remove all bedding except the fitted sheet.
- Always use the strap to lift or lower the ottoman metal frame. Close the ottoman metal frame by pushing down firmly with both hands towards the centre of the bed frame with pressure.
- No children or animals should be left unattended when the ottoman bed frame is in the upright position.
- When fully assembled, raise and lower the ottoman metal frame 4/5 times to ensure the gas pistons are fully lubricated.
- Ensure to re-tighten all nuts and bolts within the ottoman bed frame after the first two weeks of use.

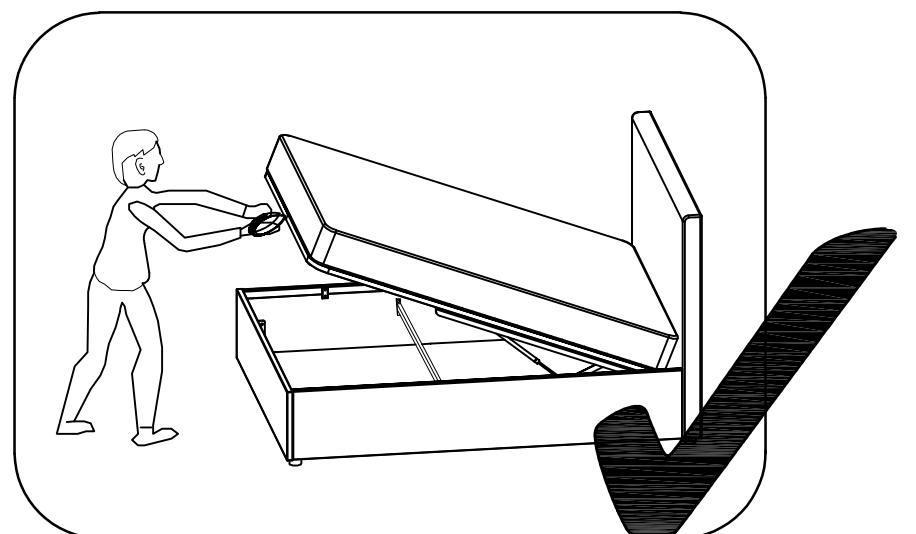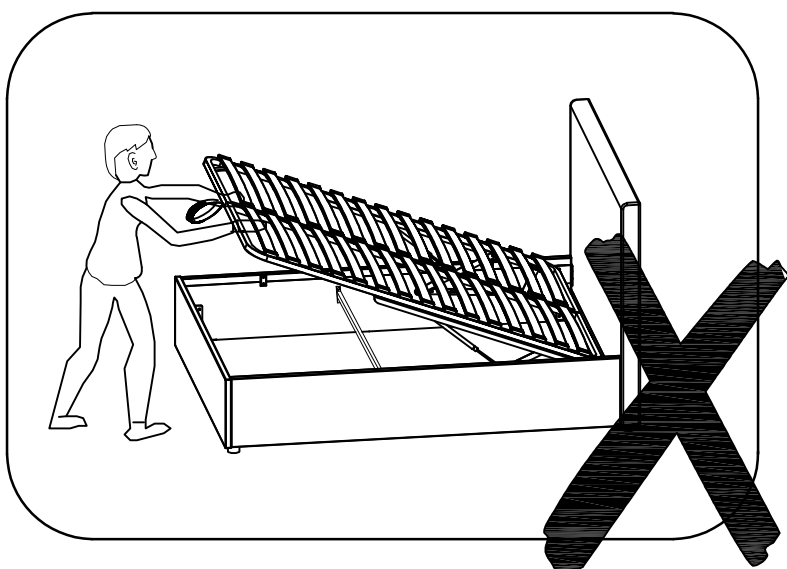

Parts

Before you begin building your ottoman bed frame, please take a moment to read through the instructions and make sure that you have all the relevant parts listed on the parts check list.

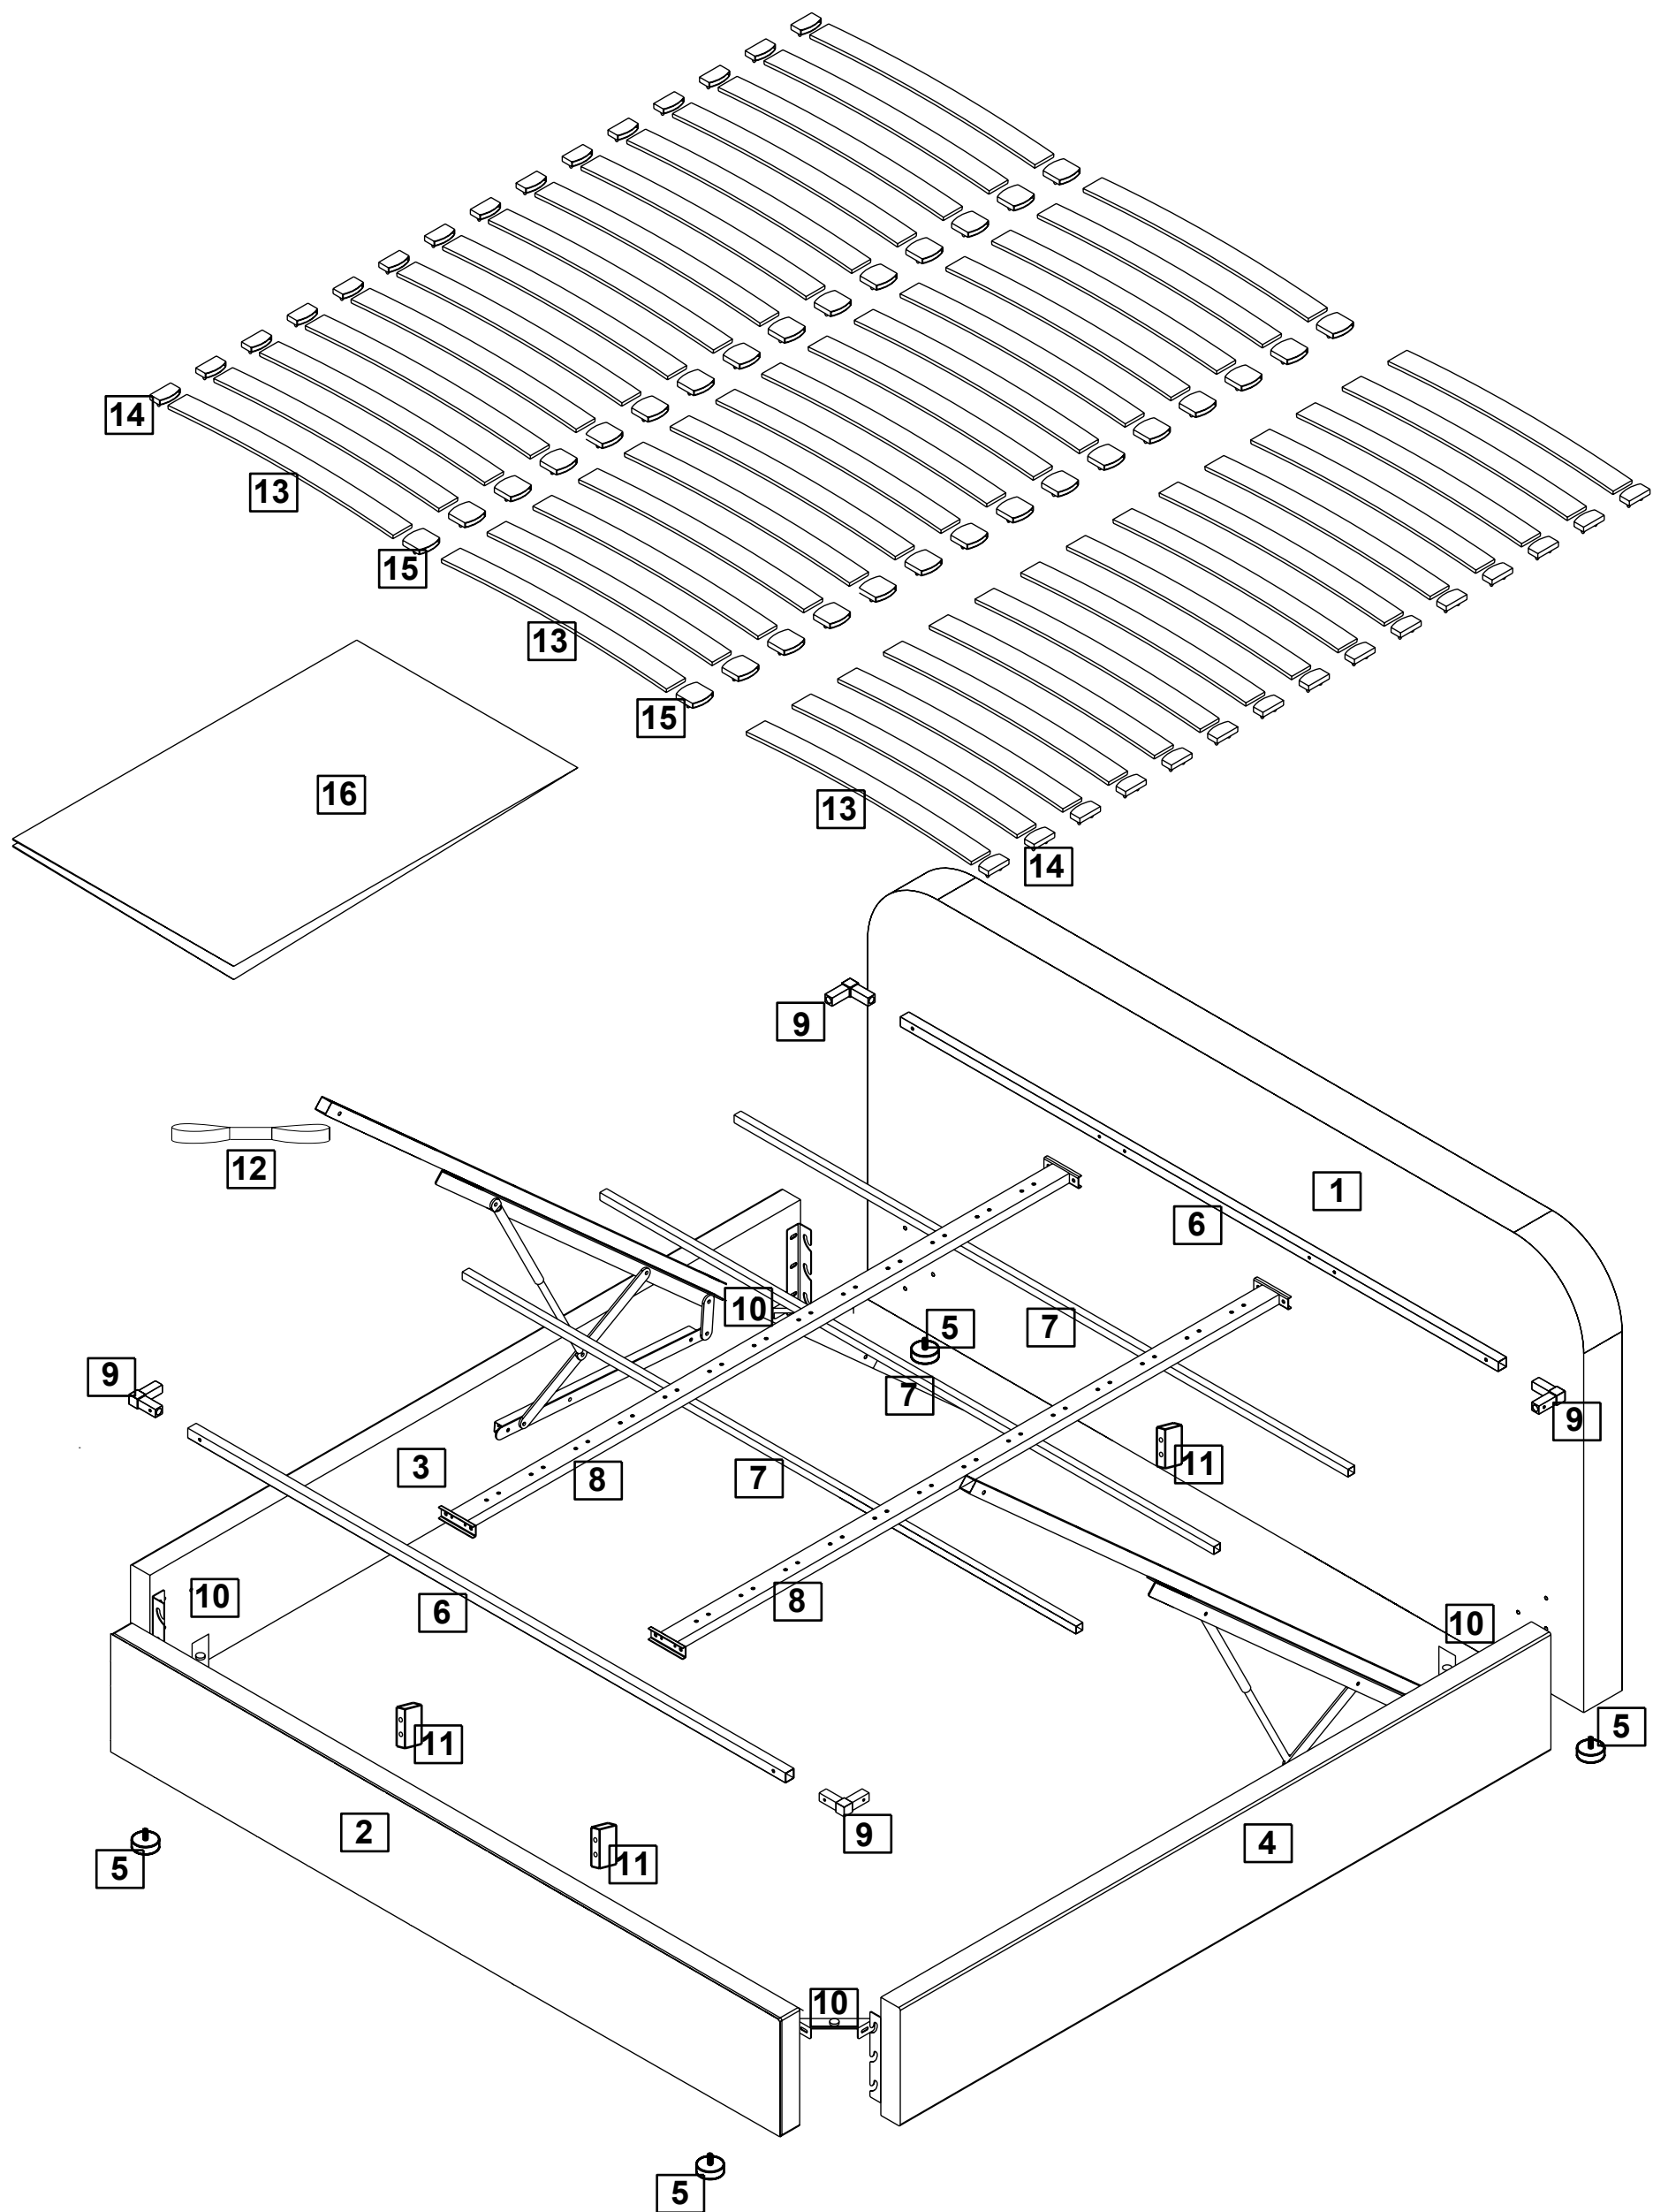











Parts Check List

| No. | Parts List | Qty | No. | Parts List | Qty |
|-----|------------------------------------|------|-----|-----------------------------|-------|
| 1 | Headboard | 1pc | 9 | Plastic Corner Bracket | 4pcs |
| 2 | Footboard | 1pc | 10 | Angle Corner Bracket | 4pcs |
| 3 | Slde Rall with Lift Mechanism - LH | 1pc | 11 | Holding Block | 3pc |
| 4 | Slde Rall with Lift Mechanism - RH | 1pc | 12 | Strap | 1pc |
| 5 | Adjustable leg | 4pcs | 13 | Slat | 45pcs |
| 6 | Front/Rear Ottoman Metal Frame | 2pcs | 14 | Side Slat Cap Double/king | 30pcs |
| 7 | Horizontal Support Rail | 3pcs | 15 | Centre Slat Cap Double/king | 30pcs |
| 8 | Central Support Rail | 2pc | 16 | Fabric Base | 1pc |

Fittings


Please check you have all the fittings listed below with your product

| | | | |
|---|--|---|---|
|  Ⓐ M8 40mm Bolt 12pcs |  Ⓑ M6 80mm Bolt 6pcs |  Ⓒ M6 30mm Bolt 6pcs |  Ⓓ M6 25mm Bolt 16pcs |
|  Ⓔ M8 Nut 2pcs |  Ⓕ Spring Washer 12pcs |  Ⓖ M8 Flat Washer 12pcs |  Ⓗ M5 Allen Key 1pc |
|  Ⓘ M4 Allen Key 1pc |  Ⓙ Spanner 1pc | | |



NB: there are additional spare Fittings included within the Fitting pack

Step 1: Attaching the Bolts to the Headboard & Footboard

- A 12pcs
- F 12pcs
- G 12pcs
- H 1pc

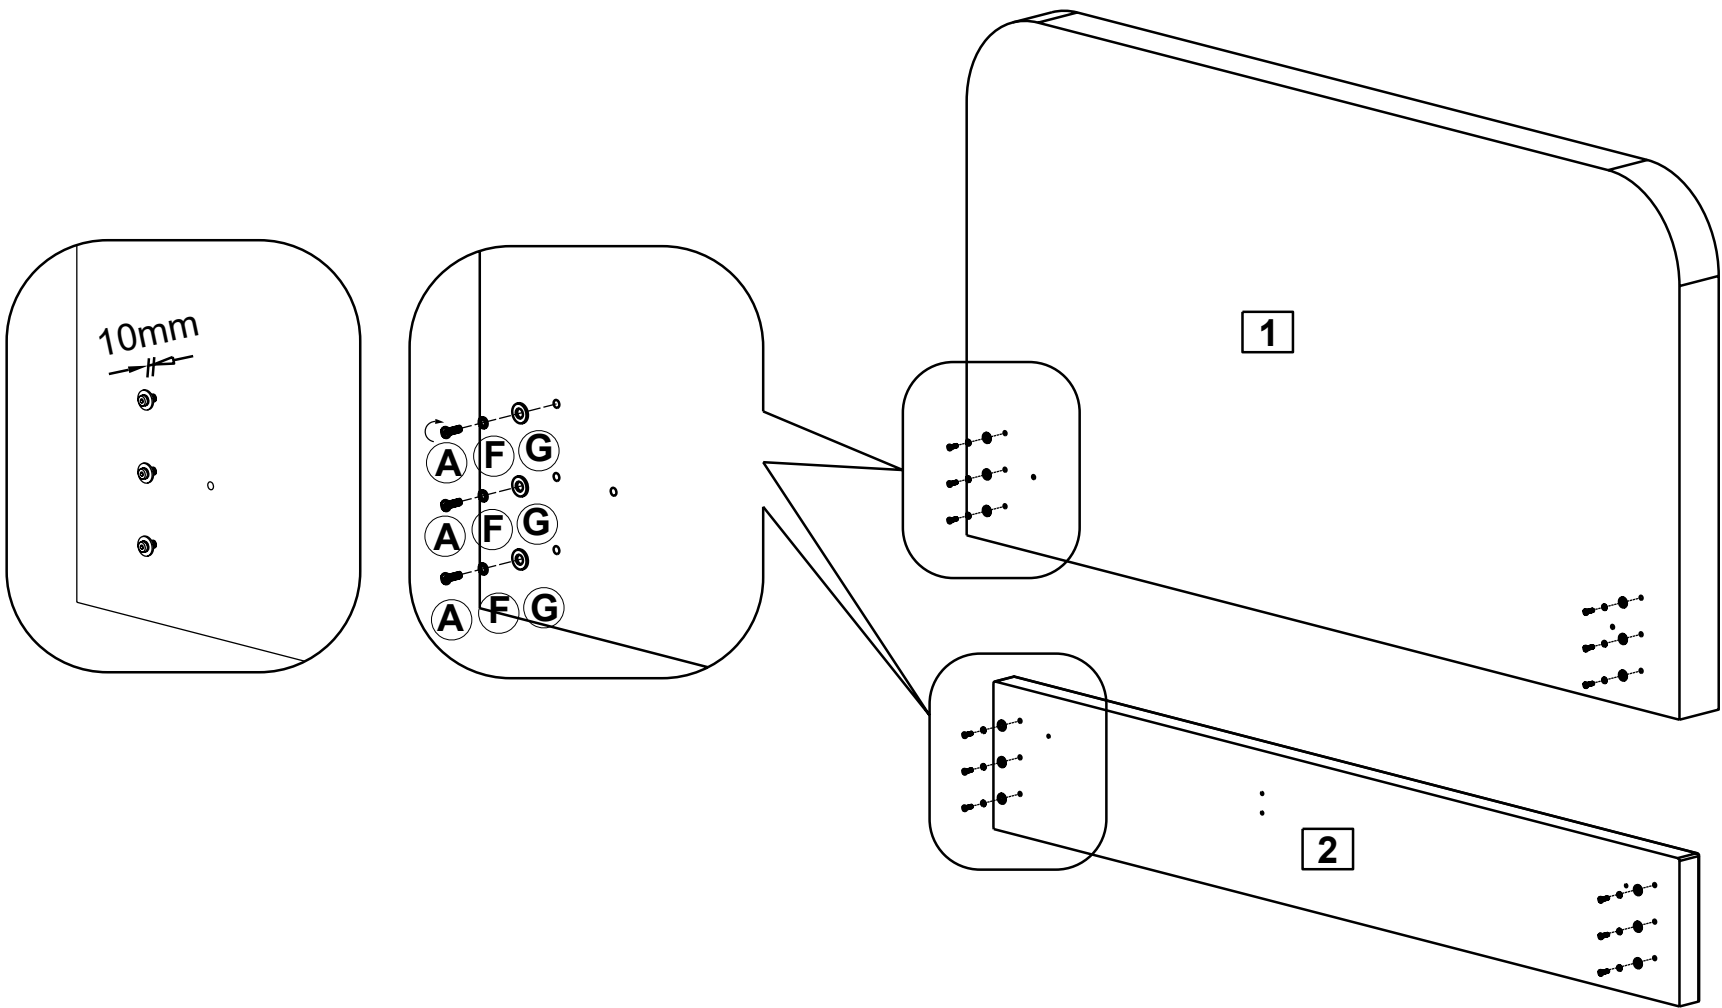


Step 2: Attaching the Left & Right Side Rails to the Headboard & Footboard

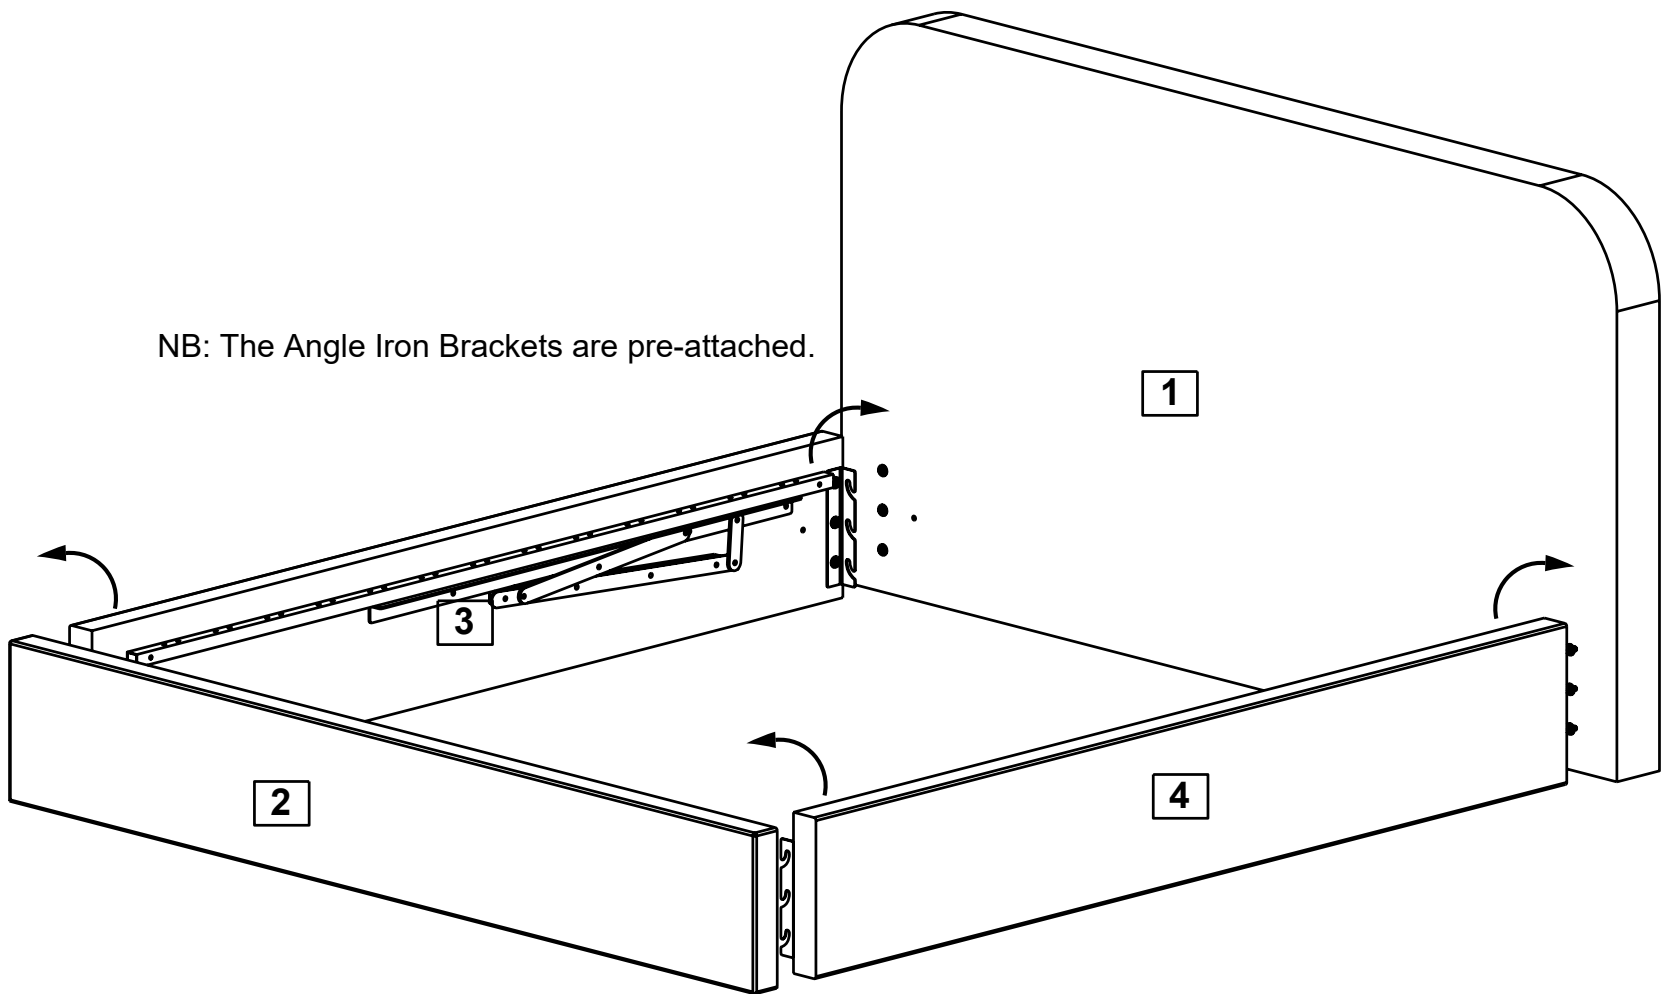

NB: Before tightening the bolts, please ensure the bed frame is square

Step 3: Attaching the Side Rails to the Headboard & Footboard using the Angle Corner Brackets


- Ⓑ 6pcs
- Ⓓ 8pcs
- Ⓛ 1pc

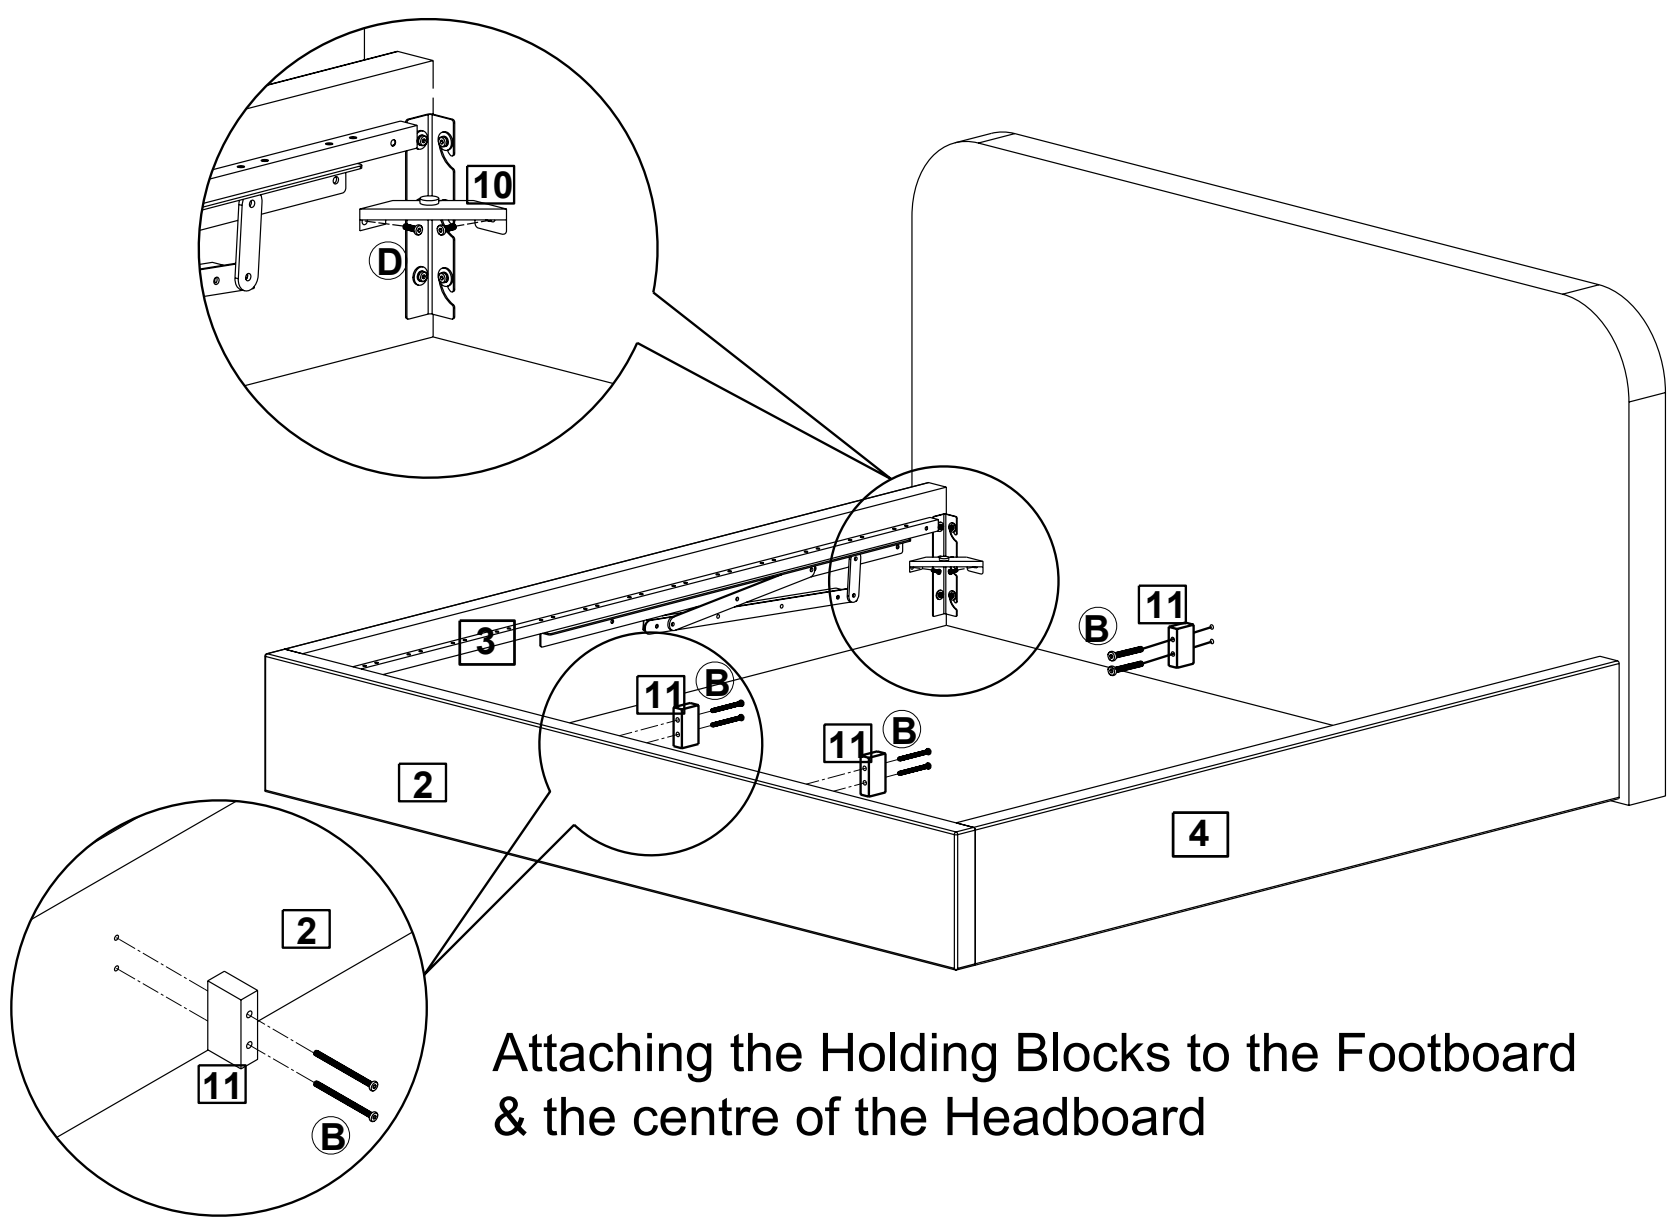



Step 4: Securing the Left & Right Side Rails to the Lifting Mechanism

- Ⓔ 2pcs
- ⓙ 1pc

a:

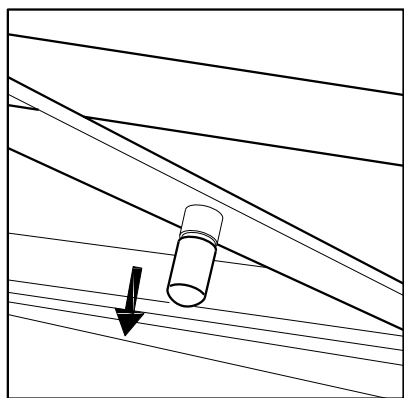


b:

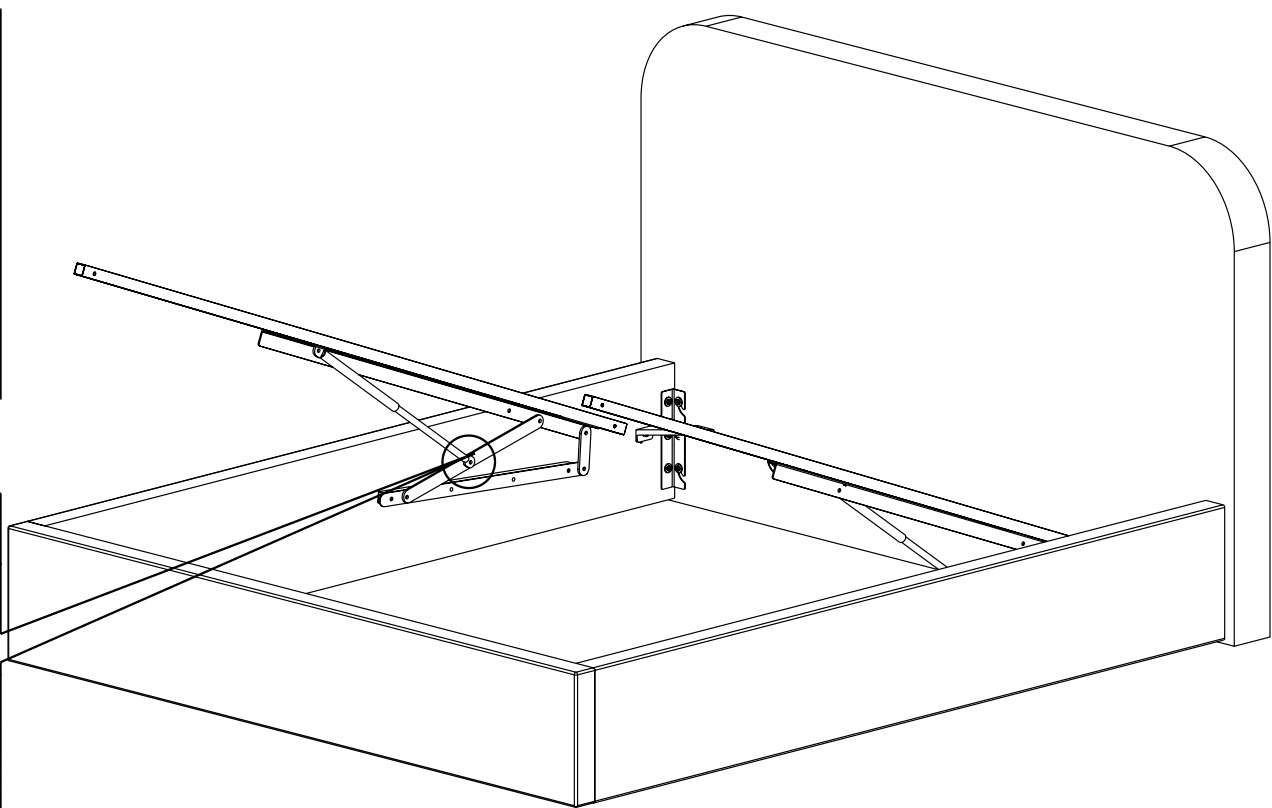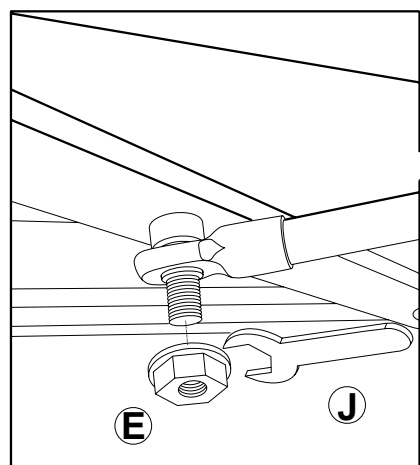


Leave the ottoman bed frame in an elevated position.

NB:Do not over tighten the Nuts.

Step 5: Attaching the Fabric Base & Legs

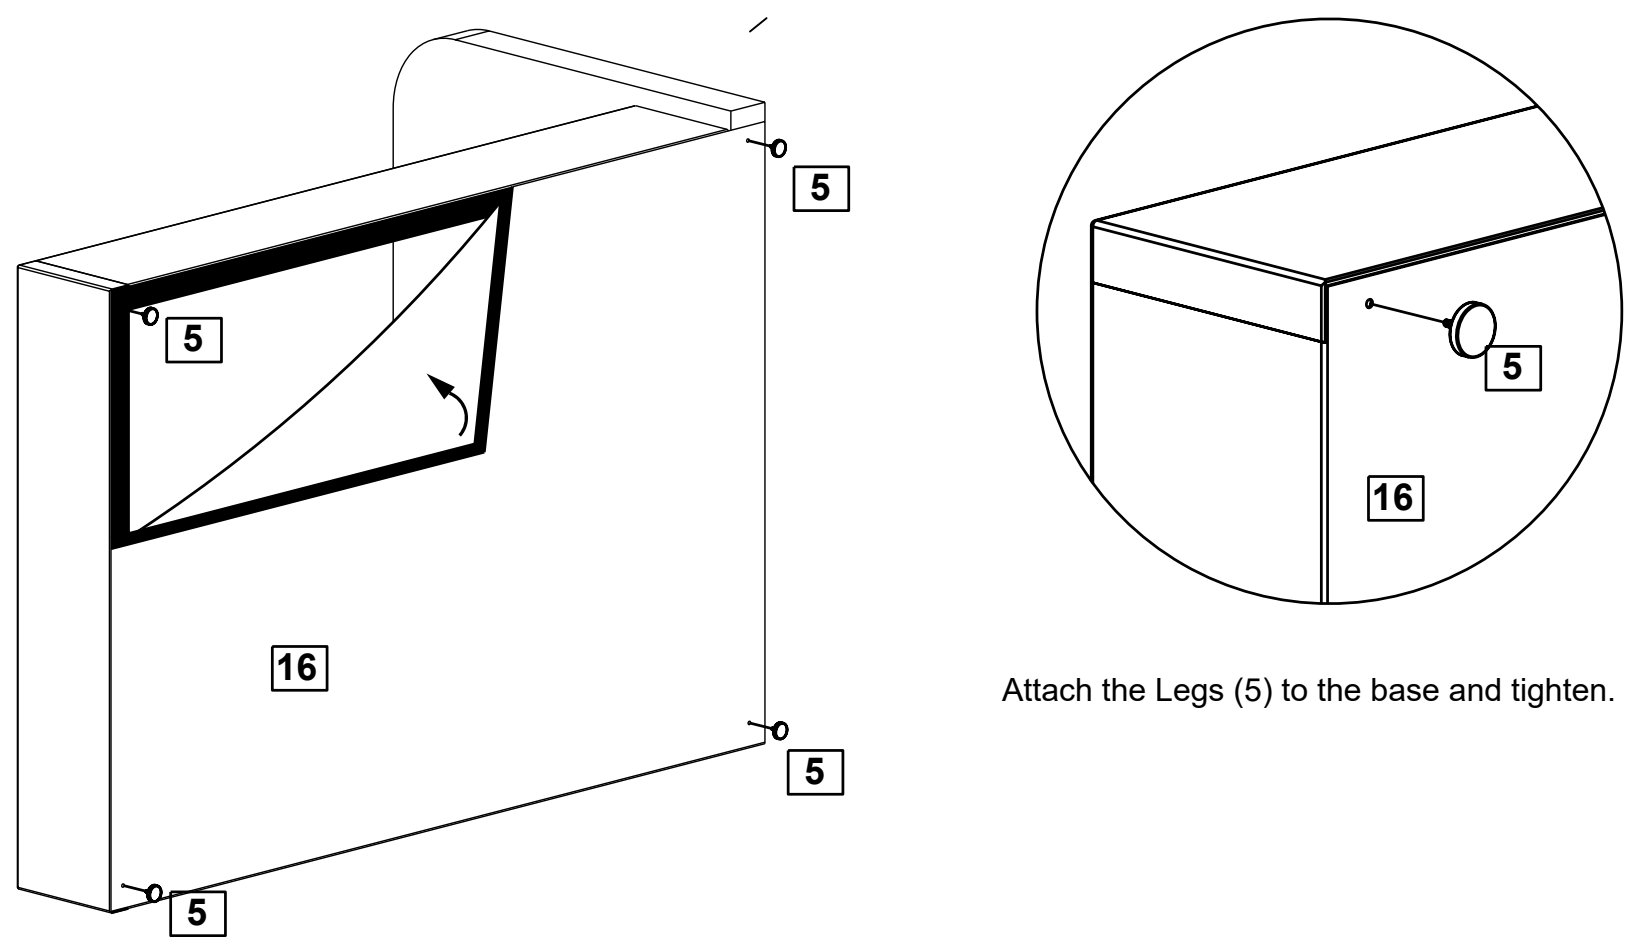


Step 6: Attaching the Rear Ottoman Metal Frame to the Side Rails

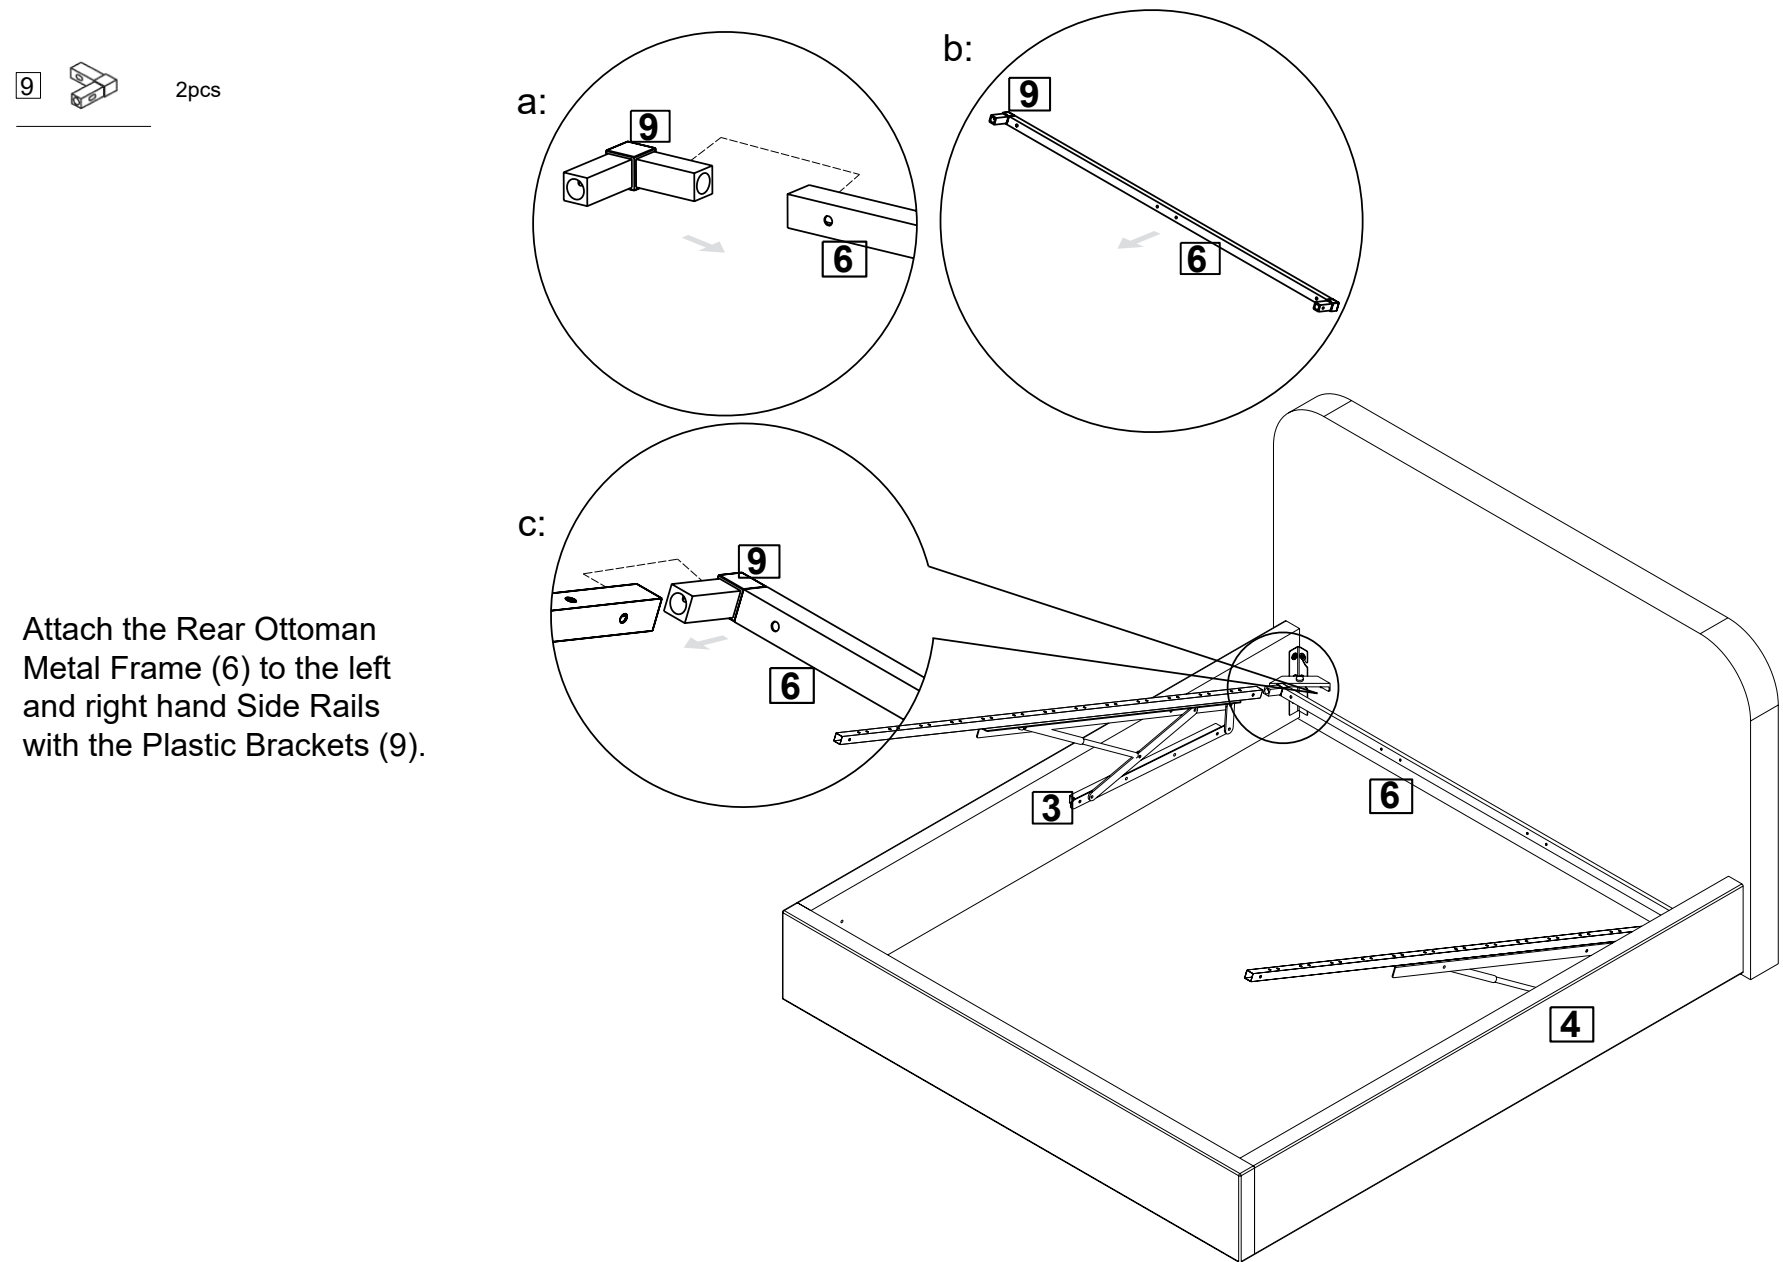


Step 7: Attaching the Horizontal Support Rails to the Left & Right Side Rails

- C 6pcs
- I 1pc

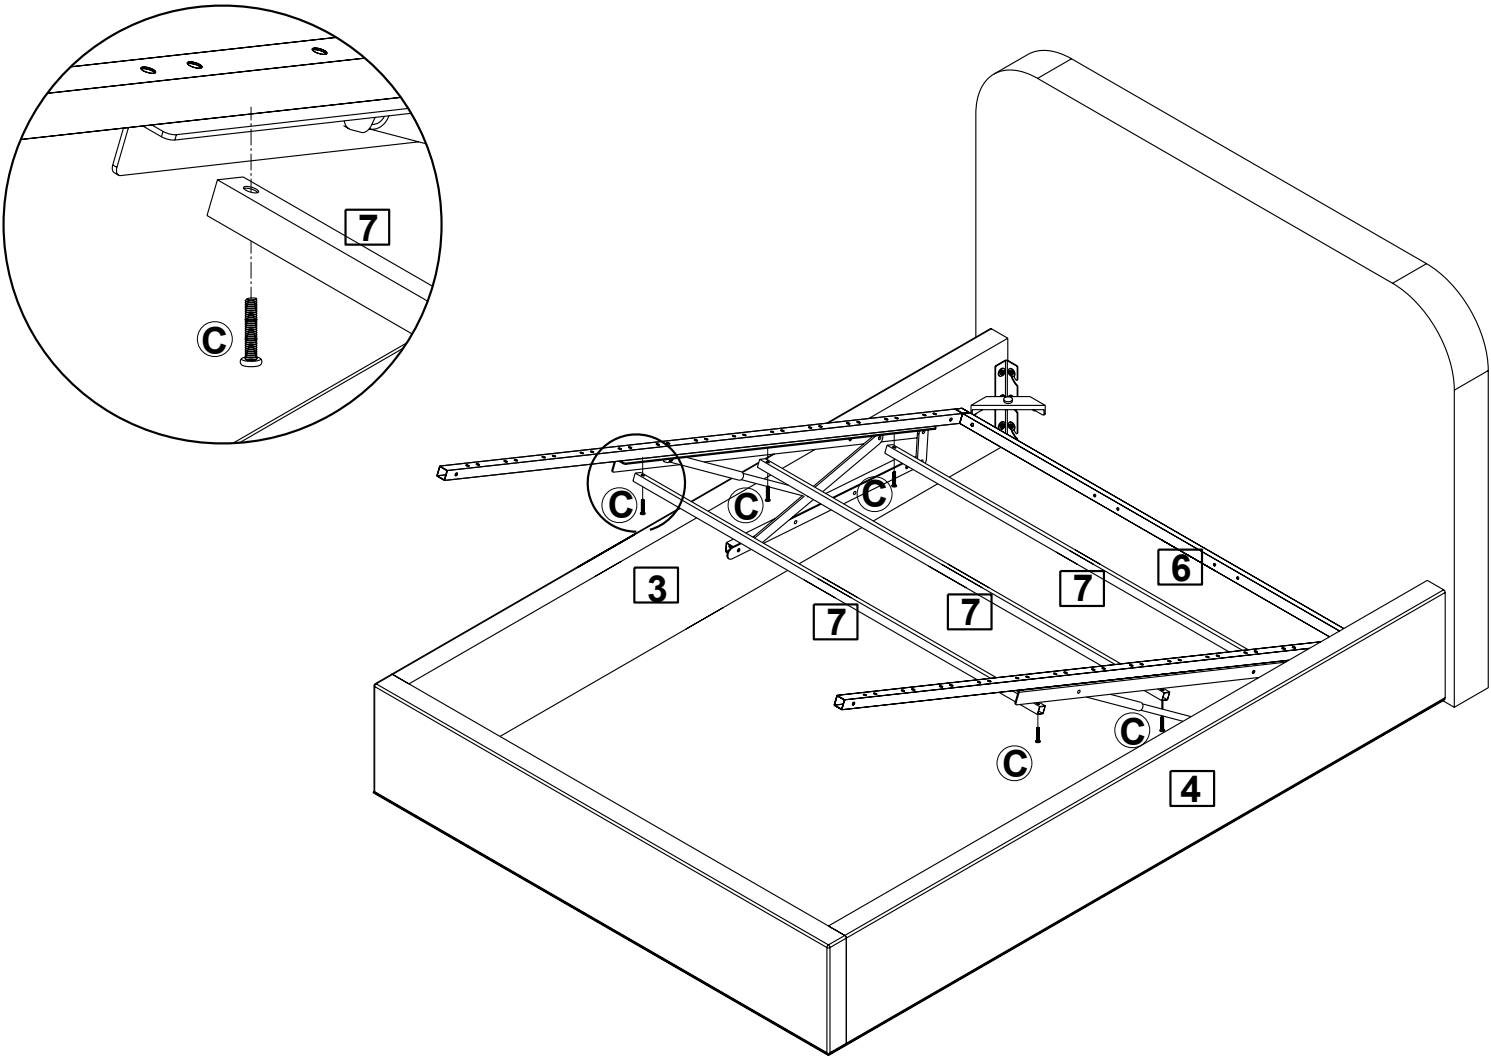


Step 8: Attaching the Centre Support Rails to the Rear Ottoman Metal Frame

- D 4pcs
- I 1pc

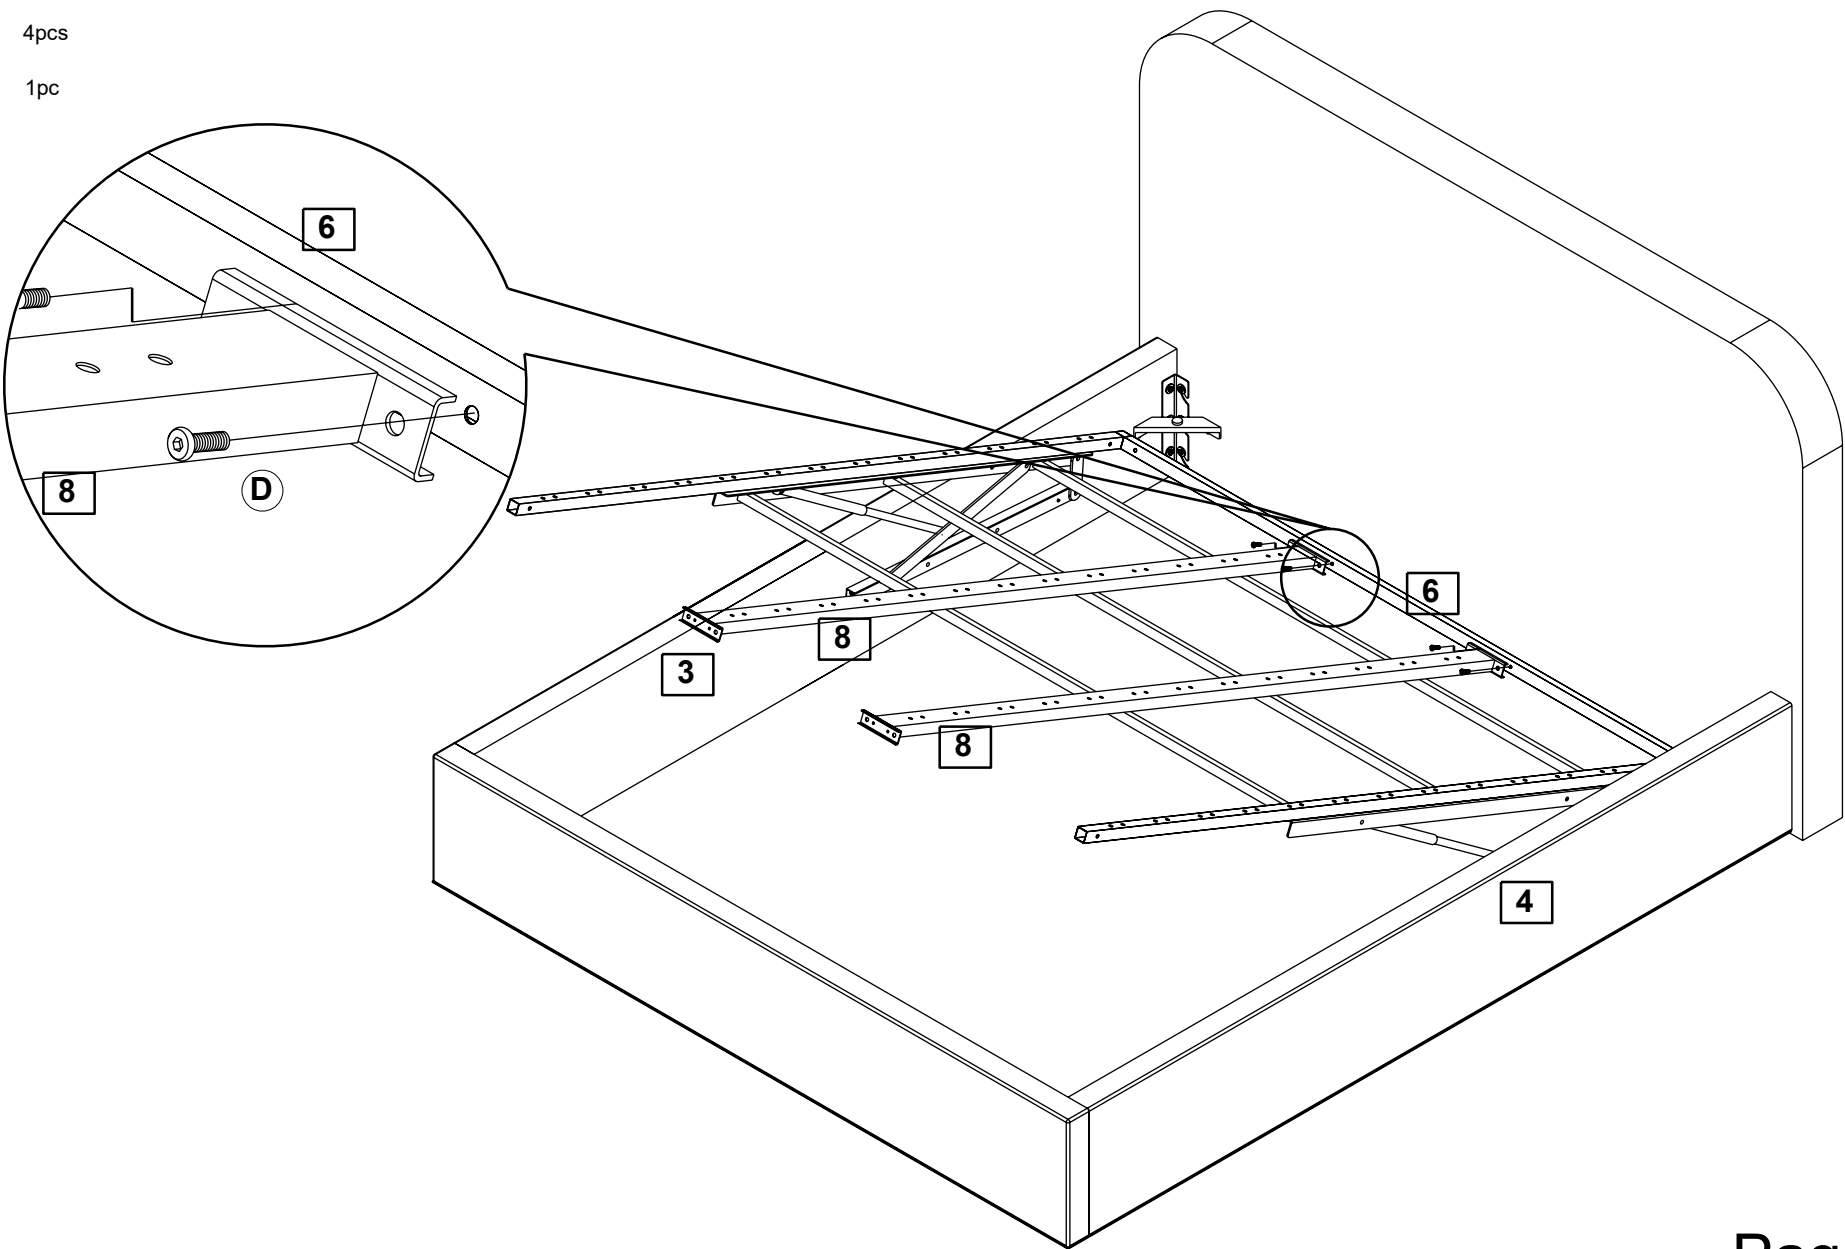


Step 9: Attaching the Central Support Rails & Side Rails to the Front Ottoman Metal Frame


- D



4pcs
- 1




1pc
- 9




2pcs

Attach the Front Ottoman Metal Frame (6) to the left and right hand Side Rails with Plastic Corner Brackets (9).

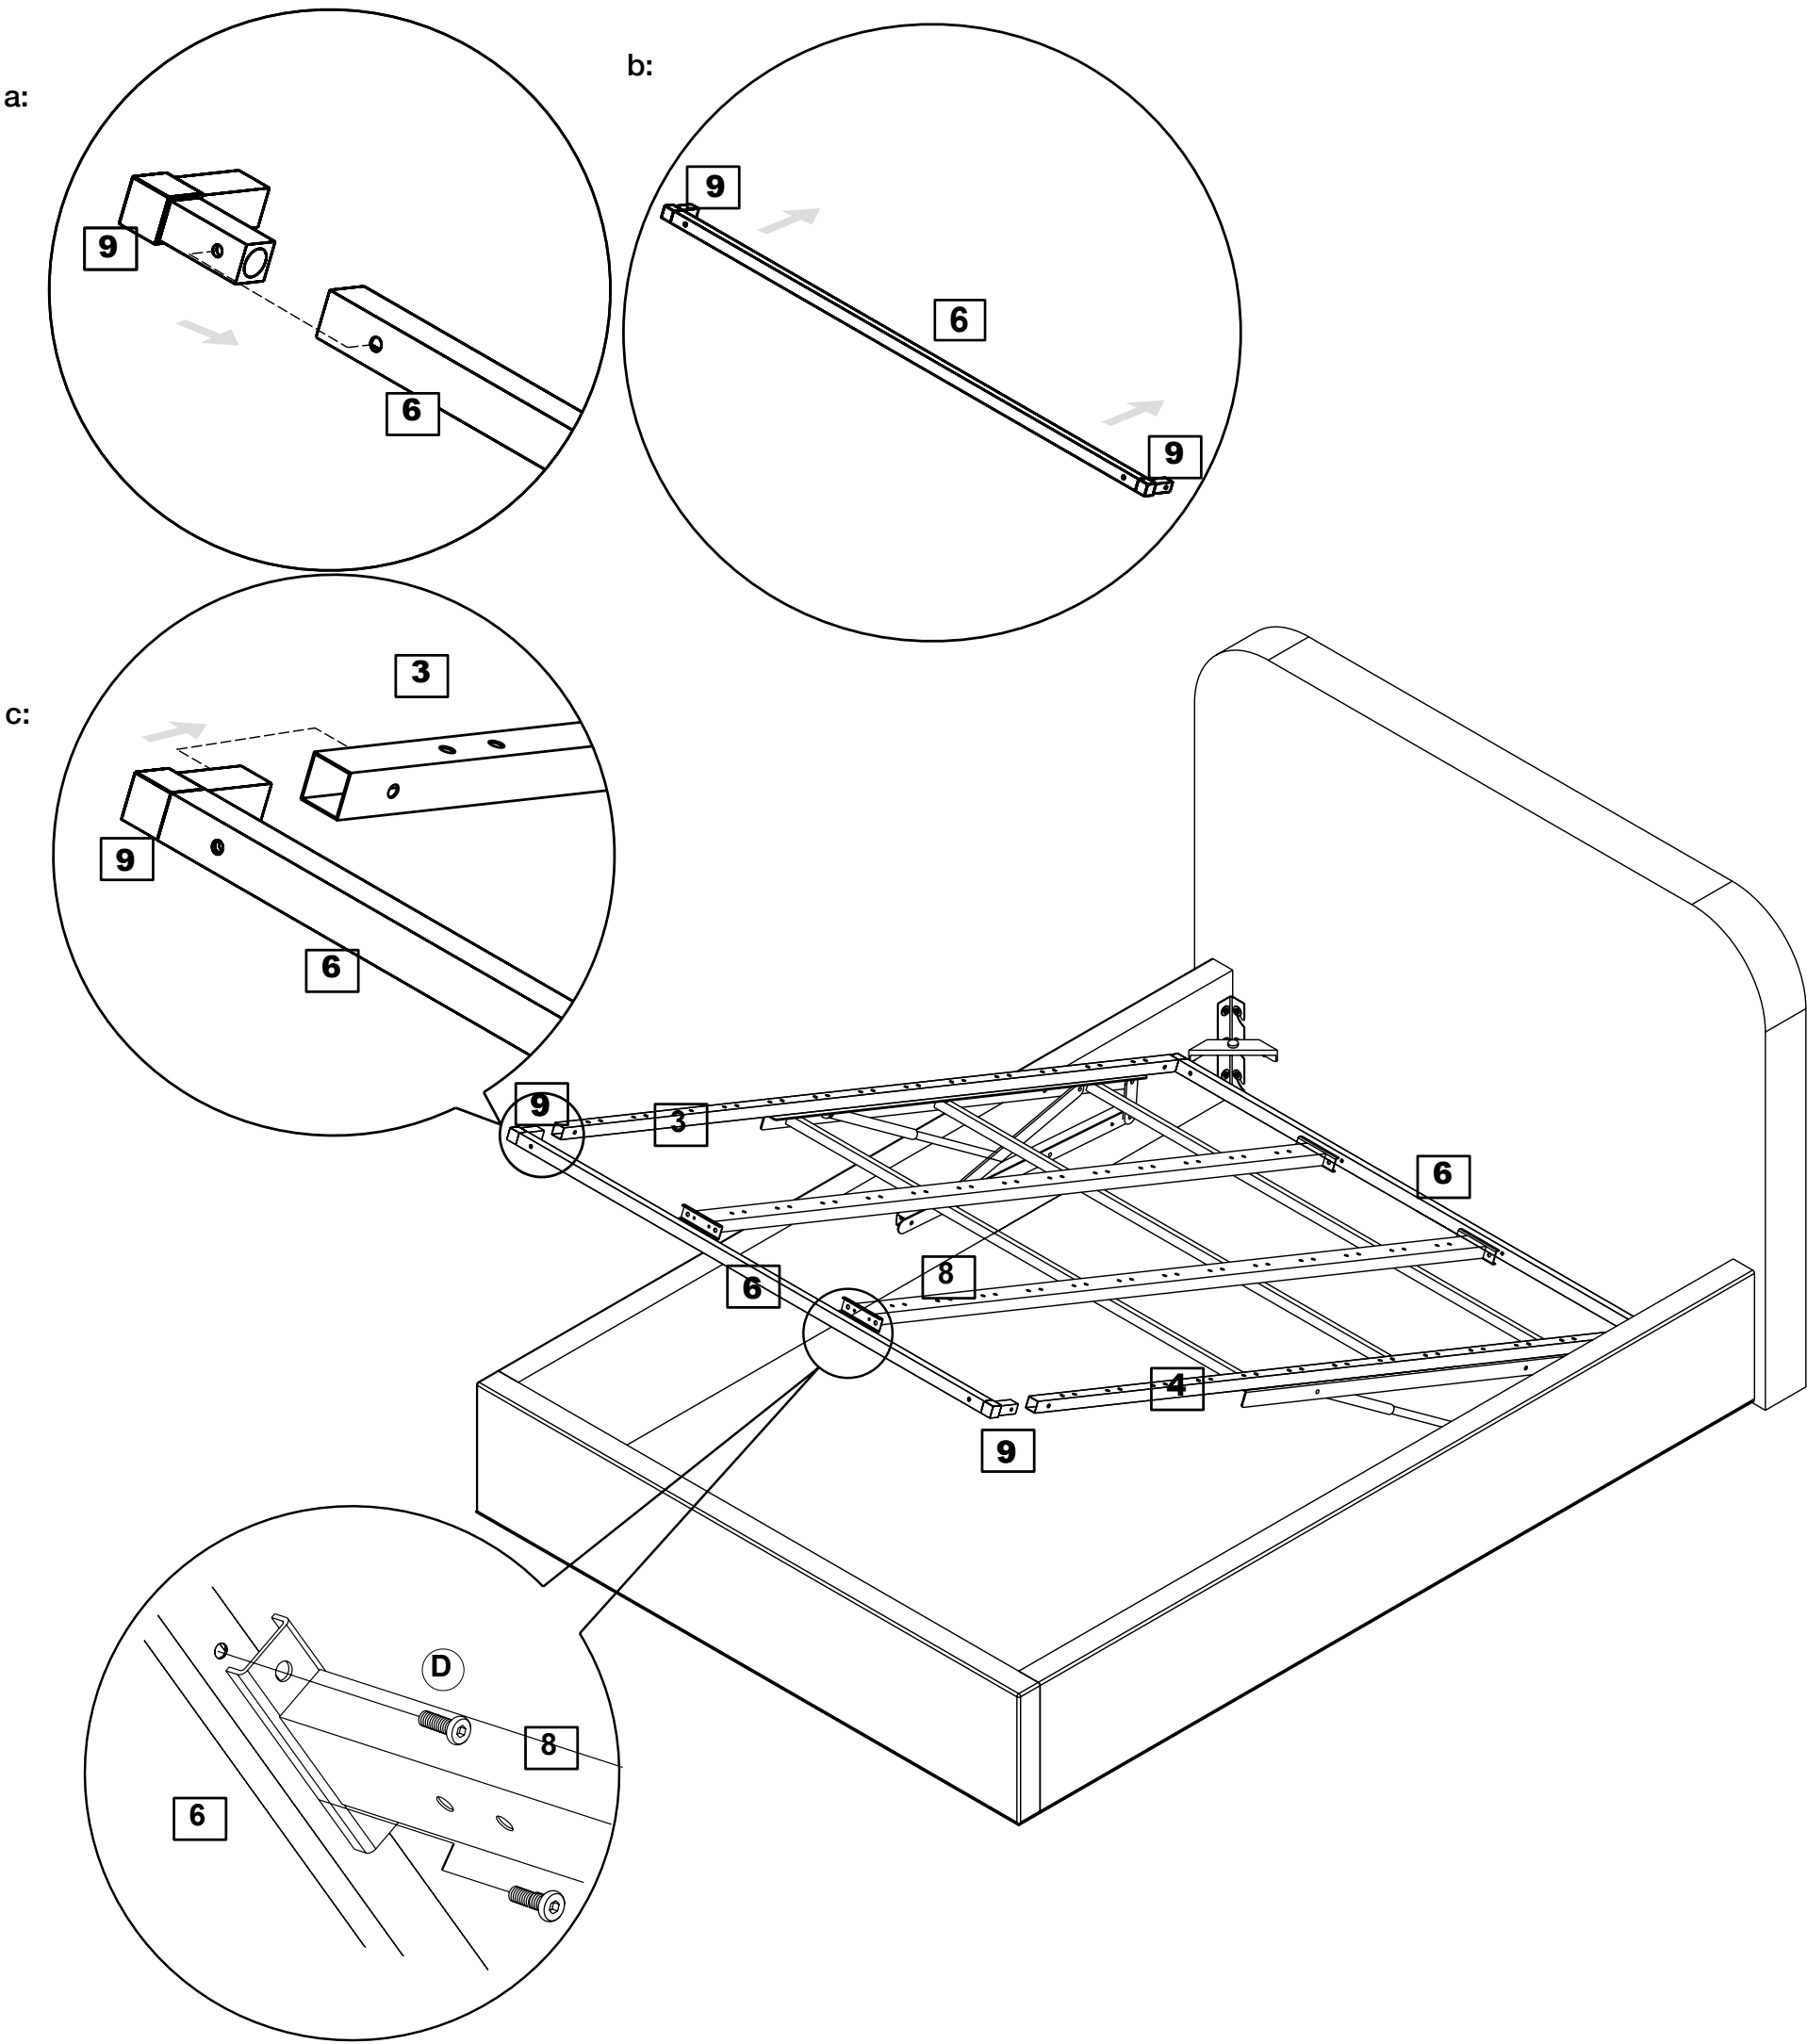


Step 10: Attaching the Slats & Strap to the Ottoman Metal Frame

- 14




Side Slat Caps Super King 30 pcs
- 15



Centre Slat Caps Super King 30 pcs

Push down firmly on the Slat Caps into the pre-drilled holes on the Ottoman Metal Frame. It is recommended to push the Centre Slat Caps into position before pushing down on the Side Slat Caps.

Attaching the Slats & Strap to the Ottoman Metal Frame – this is much easier to do with the frame closed. The frame needs to be closed without the mattress, and may need more force than expected – refer to the last page for gas strut trouble shooting.

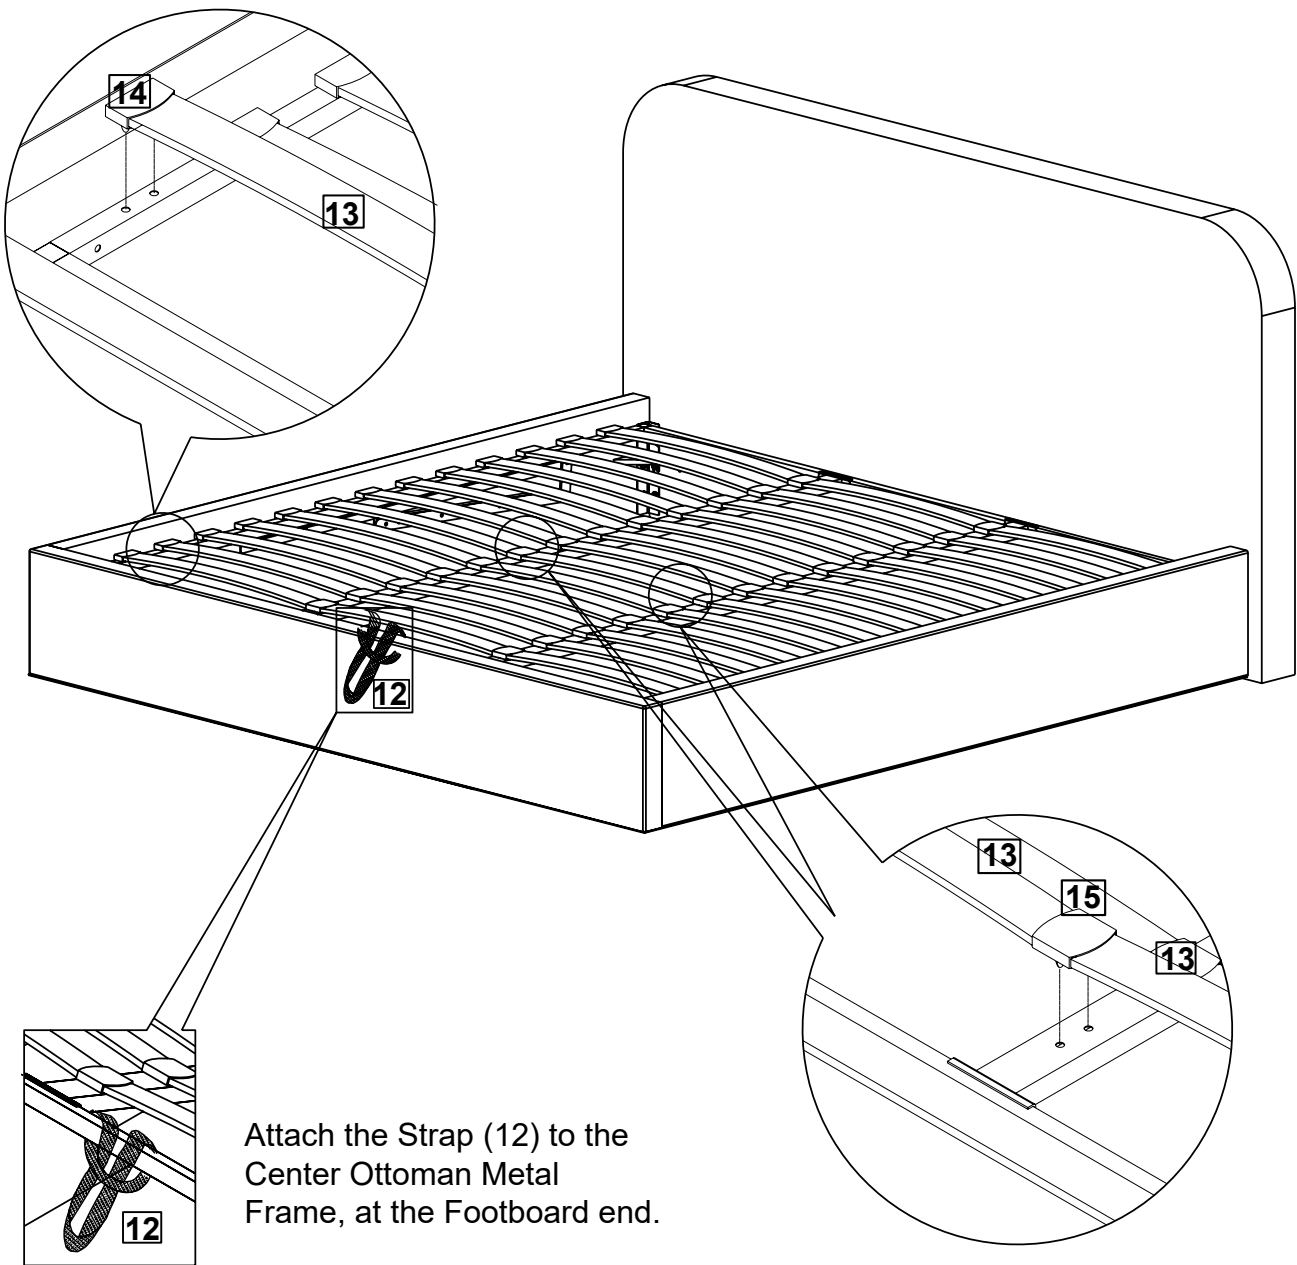

Attach the Strap (12) to the Center Ottoman Metal Frame, at the Footboard end.

Care and Maintenance

Here are some good tips to keep your new ottoman bed frame in tip-top condition.

Cleaning

To clean your new ottoman bed frame, we advise using a damp cloth if the fabric is dusty or a low suction vacuum. Do not use abrasive chemicals or bleach as this may damage the product.

Checking and Moving

Periodically, we recommend you check that the screws and fixtures haven't become loose over time. To move your bed frame, we recommend lifting it where possible, as dragging or pushing it could cause damage to the legs or flooring.

Fabric

Please note, depending on the lighting, positioning and surroundings of your room, the shade of the fabric will appear differently. Over a period of time, the fabric may also lighten or fade slightly due to light exposure.

Gas strut/piston best use:

- Use caution when operating - always use two hands.
- Only attempt to close the ottoman frame, once the mattress has been placed on the frame.
- The thicker side of the cylinder should be above the thinner side- this will increase longevity of the part.
- Only attempt to close the frame with two hands from the footboard side, slowly increasing the pressure until the frame starts moving downwards.
- Closing the frame for the first time may be difficult, as the cylinder needs cycling and lubricating. After closing for the first time, open and close a further 5 times.
- If the frame is stuck open and unable to be closed, we recommend getting assistance from a second person, both applying equal pressure from each side of the footboard until the frame closes, this may require more force than expected. Stop applying pressure if the metal frame begins to warp – contact customer services at this point.

Top tips:

- Do not attempt to close the gas strut/piston by hand, it can only be compressed once added to the frame
- Ensure the frame can move freely before adding the gas struts/pistons
- Check the frame is fully square, being offset can cause the frame to catch on the side rail