
## DUSK.COM LIVING | BEDROOM | DINING

#### Range Name: Dallas

Box dimensions: double size: box 1: W154 x D145 x H13. box 2: W207 x D28.5 x H29.5 (cm) king size: box 1: W161 x D154 x H13. box 2: W216 x D28.5 x H29.5 (cm) Product Dimensions: double size:W204 x D147 x H126cm King size: W214 x D162 x H126cm

### Dallas Bed Frame PU Tan

Double/King size

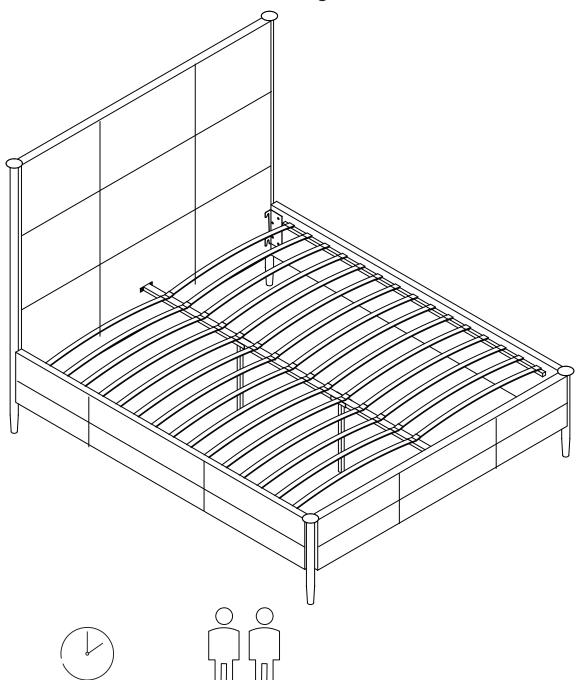



Up to 1 hour approx assembly



Two person assembly

# <u>Important</u>

#### **Assembly Tip**

Before you begin, it's best to identify all of the parts and fittings to build your bed frame. We advise laying these out on the floor to check you have everything, and to familiarise yourself with all of the parts and fittings before building.

#### **Top Tip**

We recommend that you build your new bed frame in the room you'd like it to be located. This will help prevent any risk of damage to the frame whilst moving it.

#### **Safety and Care**

It's important to ensure children and animals are kept away from the assembly area, as there are small components used in this bed frame which could present a choking hazard. All plastic and wrapping materials should also be kept away from children and animals to prevent any risk of suffocation.

#### **Help and Support**


Please contact our customer service team on 0113 519 0311 if you have any questions or issues with your purchase.

#### Recycling

Please ensure that packaging is disposed of in a safe and environmentally friendly way, and recycle where possible. Please keep your assembly instructions safe to refer back to in the future.

### **Parts**

Before you begin building your new bed frame, please take a moment to read through the instructions and make sure that you have all the relevant parts listed on the parts check list.

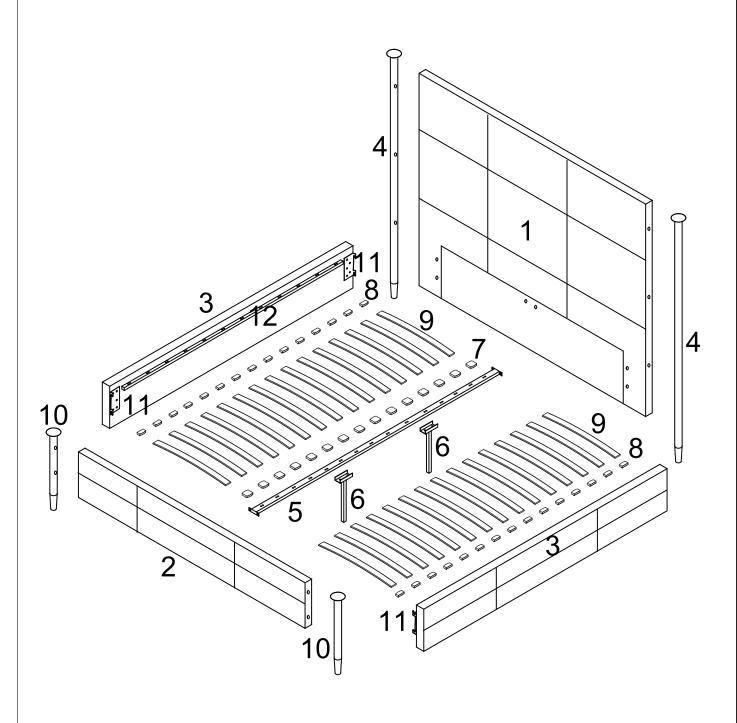


### **Part Check List**

NO.	Part list	Qty	Box No.
1	Headboard	1pc	BOX 1
2	Footboard	1pc	BOX 2
3	Side Rail	2pcs	BOX 2
4	Leg for Headboard	2 pcs	BOX 1
5	Central Support Rail	1pc	BOX 2
6	Central Leg	2pcs	BOX 1
7	Centre Slat Cap Double/King	15pcs+1	BOX 1
8	Side Slat Cap Double/King	30pcs+1	BOX 1
9	Slat Double/King	30pcs	BOX 1
10	Leg for Footboard	2pcs	BOX 1


### **Pre-assembled Parts Check List**

NO.	Part list	Qty	Box No.
11	Angle Iron Bracket	4pcs	BOX 2
12	Side Support Rail	2pcs	BOX 2

### Fittings (in Box 1)

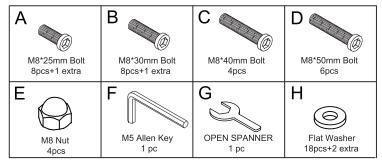


### **Pre-assembled Fittings**




### Step 1:

Attaching the leg for headboard (4) to the Headboard (1).

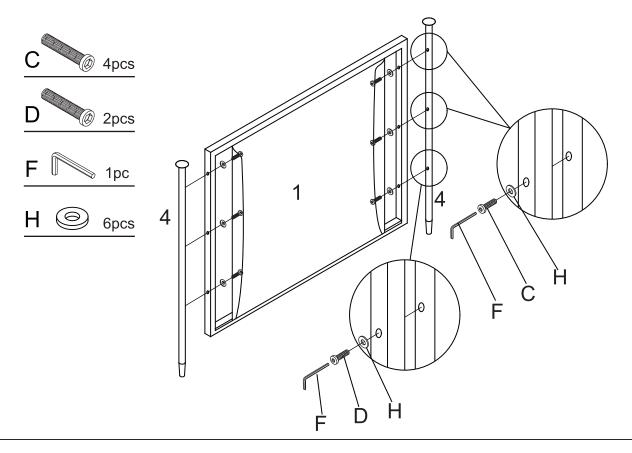


### Step 2:

Attaching the leg for footboard (10) to the Footboard (2).

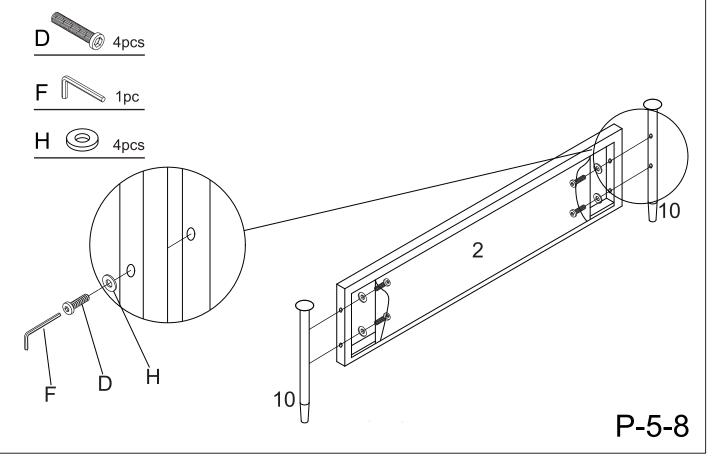


Step 3:
Attaching the Central Leg (6) to Central Support Rail(5).

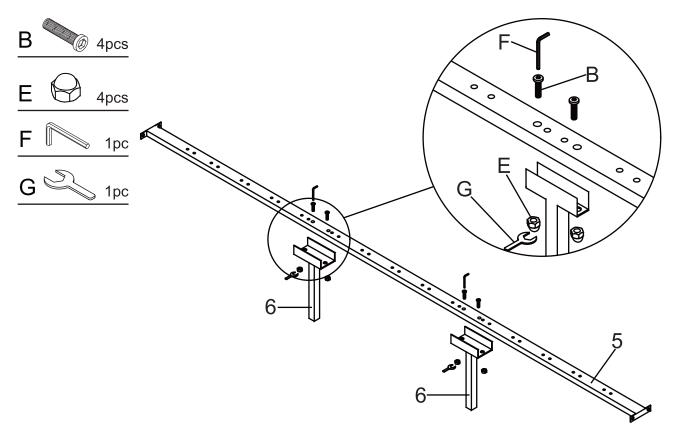


# Step 4:

Attaching the Side Rail (3) to Headboard (1) and Footboard (2).

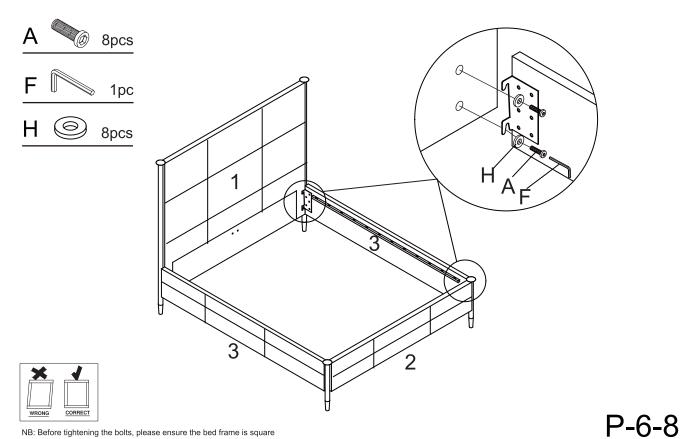


Step 5:

Attaching the Central Support Rail (5) to Headboard & Footboard, adjust the Central Log (6) to right height

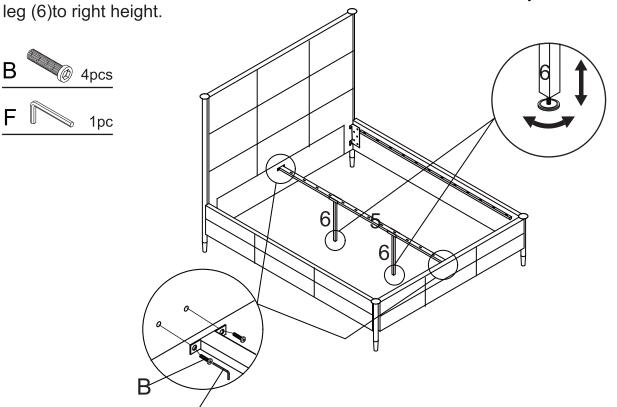

### Step 6:

Attaching the Slat Caps to the Bed Frame.

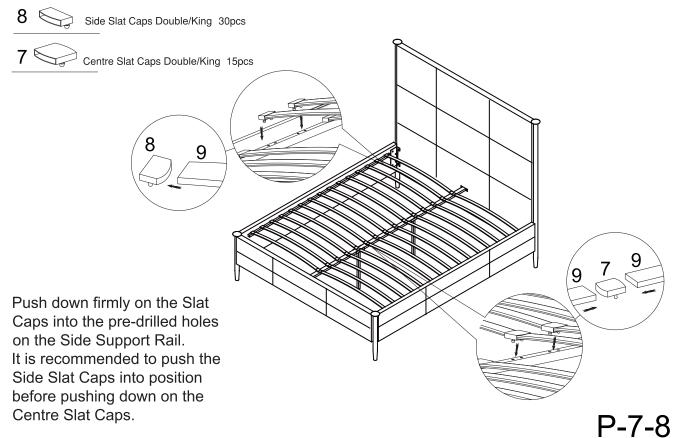

# Care and Maintenance

Here are some good tips to keep your new bed frame in tip-top condition.

#### Cleaning

To clean your new bed frame, we advise using a damp cloth if the fabric is dusty or a low suction vacuum. Do not use abrasive chemicals or bleach as this may damage the product.

#### **Checking and moving**

Periodically, we recommend you check that the screws and fixtures haven't become loose over time. To move your bed frame, we recommend lifting it where possible, as dragging or pushing it could cause damage to the legs or flooring.

#### **Fabric**

Please note, depending on the lighting, positioning and surroundings of your room, the shade of the fabric will appear differently. Over a period of time, the fabric may also lighten or fade slightly due to light exposure.

#### Gas strut/piston best use:

- Use caution when operating-always use two hands.
- Only attempt to close the ottoman frame, once the mattress has been placed on the frame.
- The thicker side of the cylinder should be above the thinner side- this will increase longevity of the part.
- Only attempt to close the frame with two hands from the footboard side, slowly increasing the pressure until the frame starts moving downwards.
- Closing the frame for the first time may be difficult, as the cylinder needs cycling and lubricating. After closing for the first time, open and close a further 5 timers.
- If the frame is stuck open and unable to be closed, we recommend getting assistance from a second person, both applying equal pressure from each side of the footboard until the frame closes, this may require more force than expected. Stop applying pressure if the metal frame begins to warp-contact customer services at this point.

#### Top tips:

- Do not attempt to close the gas strut/piston by hand, it can only be compressed once added to the frame.
- Ensure the frame can move freely before adding the gas struts/pistons
- Check the frame is fully square, being offset can cause the frame to catch on the side rail.